


MAXIMUM ELECTRIC CURRENT

A. W. G	16	14
MAX AMP	18	30

- NOTE:
- 1. MAXIMUM ELECTRICAL RATING:105°C 600 VOLTS
 - 2. WIRE RANGE:16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR:BLUE
 - 3. MATERIAL THICKNESS:t
TOLERANC:±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.80	D ±0.50	d1 ±0.20	t
16-14 AWG 1.5-2.5 mm ²	RT-N22-14	2.2	6.4	4.3	18.5	11.0	4.5	2.3	0.8
	RT-N32-14	3.2	6.4	4.3	18.5				
	RT-N37S-14	3.7	6.4	4.3	18.5				
	RT-N37S-14	3.7	6.6	6.3	20.5				
	RT-N37L-14	3.7	8.5	7.8	23.0				
	RT-N43S-14	4.3	6.6	6.3	20.5				
	RT-N43L-14	4.3	8.5	7.8	23.0				
	RT-N53S-14	5.3	8.5	7.8	23.0				
	RT-N53L-14	5.3	9.5	7.3	23.0				
	RT-N65-14	6.5	12.0	11.0	28.0				
	RT-N84-14	8.4	12.0	11.0	28.0				
	RT-N105-14	10.5	13.6	13.9	31.7				
	RT-N130-14	13.0	19.2	16.0	36.6				

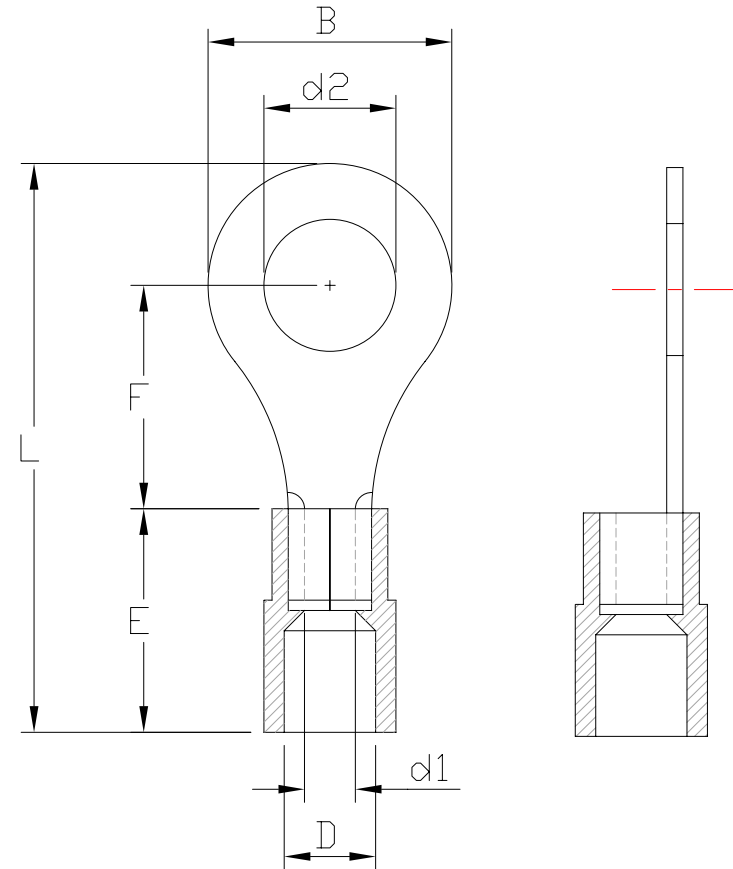

MATERIAL
INSULATION: NYLON
MATERIAL: COPPER
TIN PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RT-Nxx-14-LF
SERIES T LEADFREE
14~16 AWG
22:2.2 d2
130:13 d2
NYLON

DESCRIPTION: