


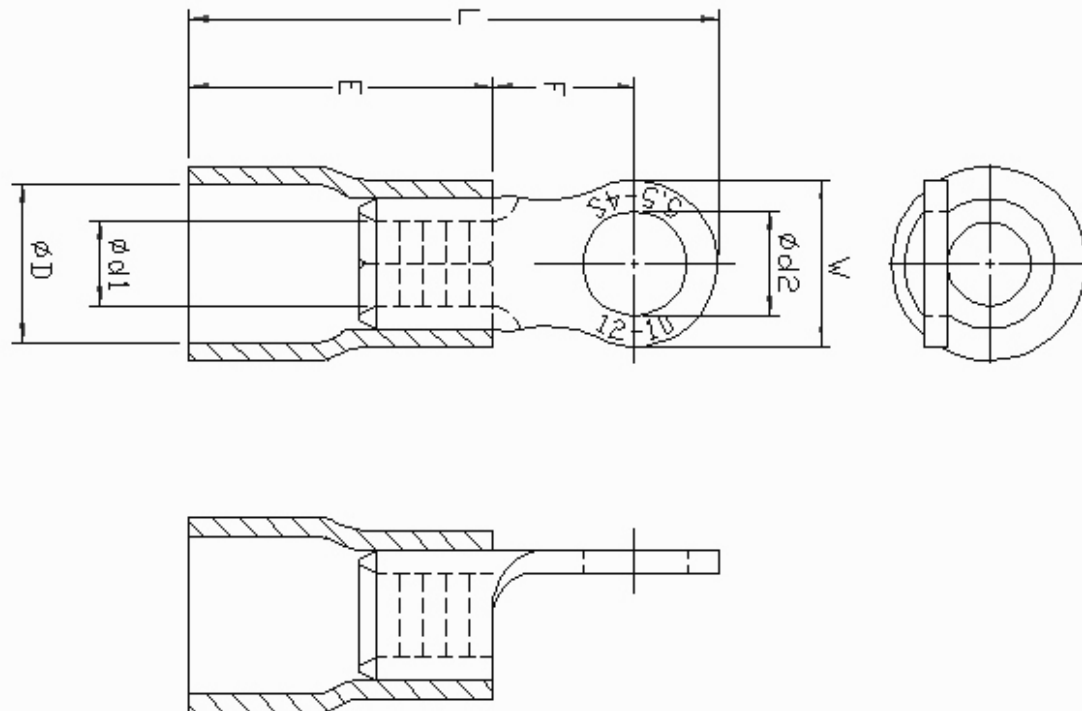

| 項目<br>ITEM | 公差<br>TOLERANCE                  |     | STUD SIZE |     | W±0.2 | F±0.3 | L±1.0 | E±0.5 | øD±0.3 | ød1±0.2 |  |  |  |
|------------|----------------------------------|-----|-----------|-----|-------|-------|-------|-------|--------|---------|--|--|--|
|            | ød2 <sup>+0.2</sup> <sub>0</sub> |     |           |     |       |       |       |       |        |         |  |  |  |
| 尺寸<br>SIZE | #8                               | 4.3 | 7.2       | 6.1 | 22.7  | 13.0  | 6.8   | 3.4   |        |         |  |  |  |

|                                      |                                   |
|--------------------------------------|-----------------------------------|
| 單位 UNIT : mm                         |                                   |
| 規格<br>WIRE RANGE :                   | 12-10 A.W.G (4-6mm <sup>2</sup> ) |
| 溫度與電壓<br>MAXIMUM ELECTRICAL RATING : | 75°C 600 VOLTS MAX.               |
| 電流<br>MAXIMUM ELECTRIC CURRENT :     | 48 AMPERE                         |

|                             |                  |
|-----------------------------|------------------|
| 端子材質<br>TERMINAL MATERIAL   | COPPER<br>TIN PL |
| 絕緣材質<br>INSULATION MATERIAL | VINYL            |
| 顏色<br>INSULATION COLOR      | YELLOW           |
| 金屬厚度<br>THICKNESS           | 1.0              |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±  
X.±  
.XX±  
.XXX±  
ANG±

PPOJECTION

照片框

ORDER INFORMATION

RT-V43S-10-LF  
SERIES T LEADFREE  
10~12AWG  
S TYPE  
DIA 4.3mm  
PVC

DESCRIPTION: