


MATERIAL
INSULATION: VINYL
MATERIAL: COPPER
TIN PLATING

MAXIMUM ELECTRIC CURRENT

A. W. G	12	10
MAX AMP	35	50

- NOTE:
- 1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
 - 2. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
 - 3. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
12-10 AWG 4-6 mm ²	RT-V32-10	3.2	7.2	5.9	22.5	13.0	6.5	3.4	1.0
	RT-V37S-10	3.7	7.2	5.9	22.5				
	RT-V37L-10	3.7	9.5	8.3	26.0				
	RT-V43S-10	4.3	7.2	5.9	22.5				
	RT-V43L-10	4.3	9.5	8.3	26.0				
	RT-V53-10	5.3	9.5	8.3	26.0				
	RT-V65-10	6.5	12.0	10.5	29.5				
	RT-V84-10	8.4	15.0	13.7	34.2				
	RT-V105-10	10.5	15.0	13.7	34.2				
	RT-V130-10	13.0	19.2	16.0	38.6				

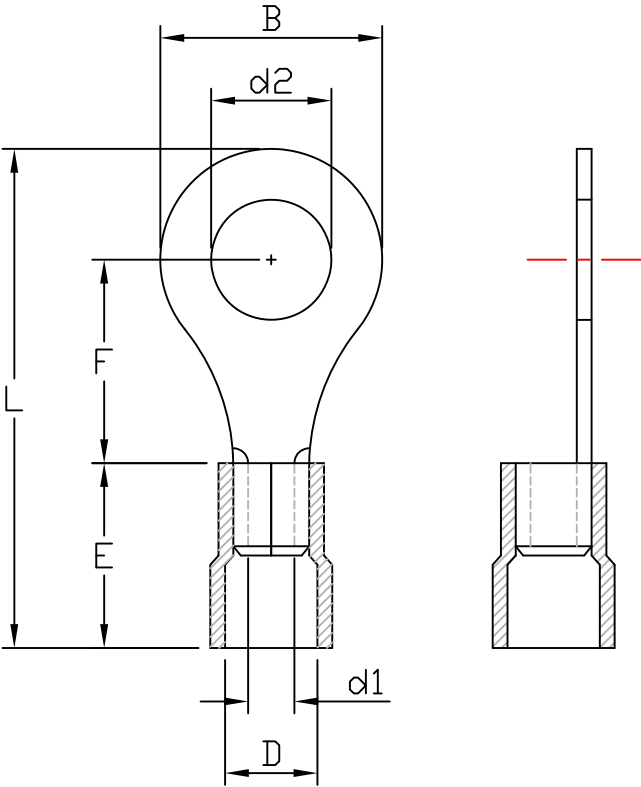

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RT-Vxxy-10-LF
SERIES T LEADFREE
10~12 AWG
S.L
32:3.2 d2
130:13.0 d2
VINYL

DESCRIPTION: