


MAXIMUM ELECTRIC CURRENT

A. W. G	16	14
MAX AMP	18	30

NOTE:

1. MAXIMUM ELECTRICAL RATING:105°C 600 VOLTS
2. WIRE RANGE:16-14AWG / 1.5-2.5 mm²
INSULATED COLOR:BLUE
3. MATERIAL THICKNESS:t
TOLERANC:±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
16-14 AWG 1.5-2.5 mm ²	RT-V22-14	2.2	6.4	4.3	17.5	10.0	4.5	2.3	0.8
	RT-V32-14	3.2	6.4	4.3	17.5				
	RT-V37S-14	3.7	6.4	4.3	17.5				
	RT-V37M-14	3.7	6.6	6.3	19.5				
	RT-V37L-14	3.7	8.5	7.8	22.0				
	RT-V43S-14	4.3	6.6	6.3	19.5				
	RT-V43L-14	4.3	8.5	7.8	22.0				
	RT-V53S-14	5.3	8.5	7.8	22.0				
	RT-V53L-14	5.3	9.5	7.3	22.0				
	RT-V65-14	6.5	12.0	11.0	27.0				
	RT-V84-14	8.4	12.0	11.0	27.0				
	RT-V105-14	10.5	13.6	13.9	30.7				
	RT-V130-14	13.0	19.2	16.0	35.6				

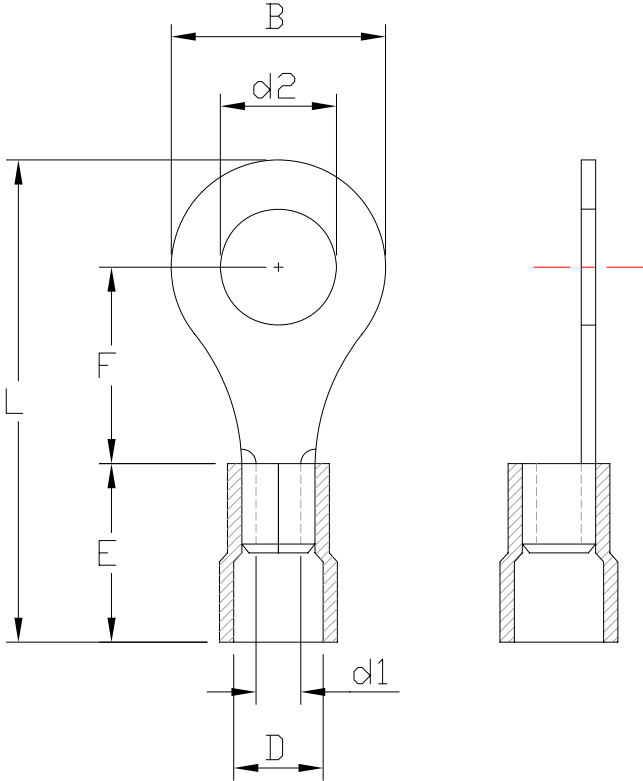

MATERIAL
INSULATION:VINYL
MATERIAL:COPPER
TIN PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RT-Vxxy-14-LF
SERIES T LEADFREE
14~16 AWG
S.M.L
22:2.2 d2
130:13.0 d2
VINYL

DESCRIPTION: