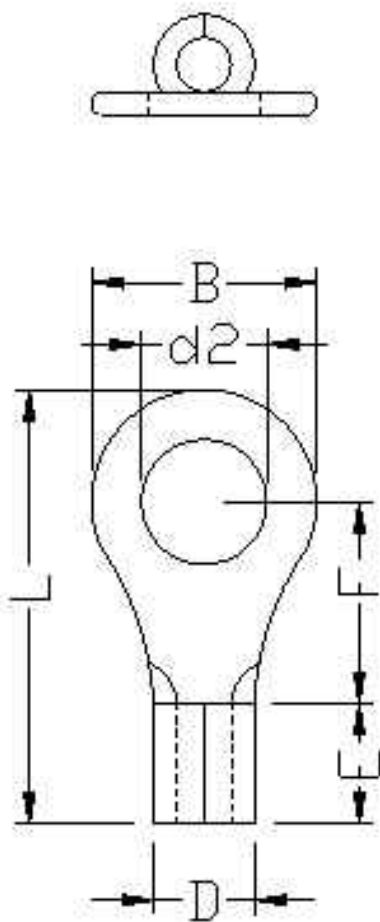


端子材質:COPPER

適用電線: 12-10AWG

耐用電壓: 600 VOLTS MAX

包裝數量:1000PCS

表面處理:鍍錫

單位:mm

|           |                                       |            |             |
|-----------|---------------------------------------|------------|-------------|
| B:7.2±0.3 | L:15.7±1.0                            | F:6.1±0.3  | E:6.0±0.3   |
| D:6.4±0.3 | C=3.5 <sup>+0.3</sup> <sub>-0.2</sub> | T:1.0±0.03 | d2:3.2±0.15 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

RT-X32-10-LF  
SERIES T LEADFREE  
10~12 AWG  
ID:3.2mm  
NON PVC

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: