


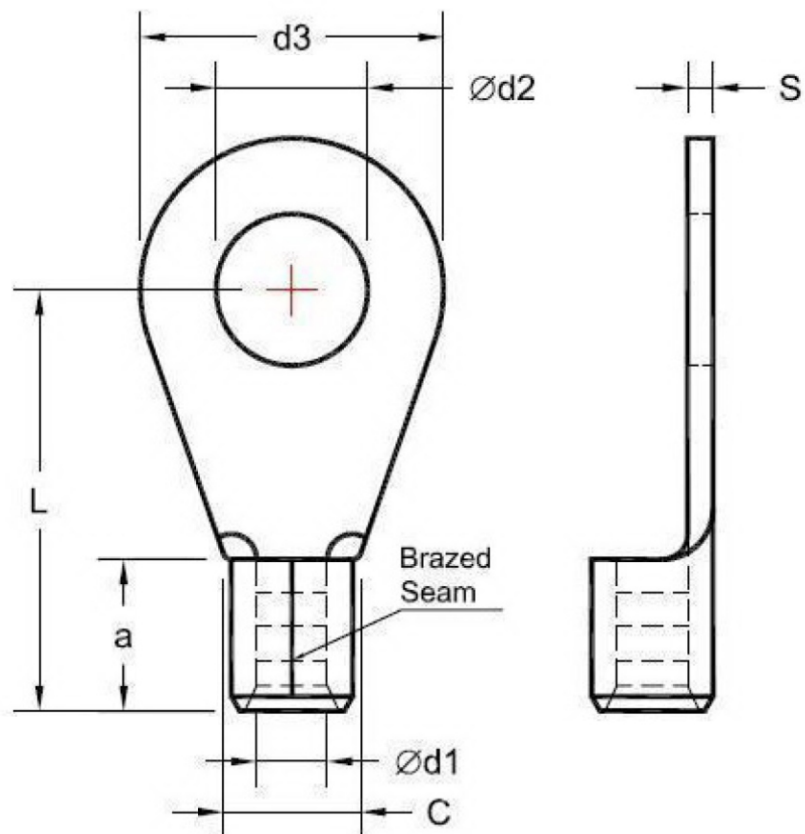

a : 5.0 ± 0.5
 C : 4.5 min
 Ød1 : Ø2.3 ± 0.25
 Ød2 : Ø5.3 ± 0.22
 d3 : 10.0 ± 0.22
 L : 14.0 ± 0.5
 S : 0.80

品名 PART NO.	RT-X53-14	標準包裝 STANDARD PACKING	1000PCS
端子材質 TERMINAL MATERIAL	COPPER	表面處理 SURFACE TREATMENT	Tin-Plated
絕緣材質 INSULATION MATERIAL		電流 MAX.CURRENT RATING	27 A
絕緣顏色 INSULATION COLOR		電壓 MAX.VOLTAGE RATING	
適用電線 APPLICABLE WIRES	16-14 A.W.G. 1.5-2.5 mm ²	溫度 AMBIENCE TEMPERATURE	
銅材厚度 THICKNESS	0.80 mm	附銅管 DOUBLE CRIMP	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

RT-X53-14-LF
 SERIES | LEADFREE
 14~16 AWG
 ID:5.3mm
 NON PVC

DESCRIPTION: