

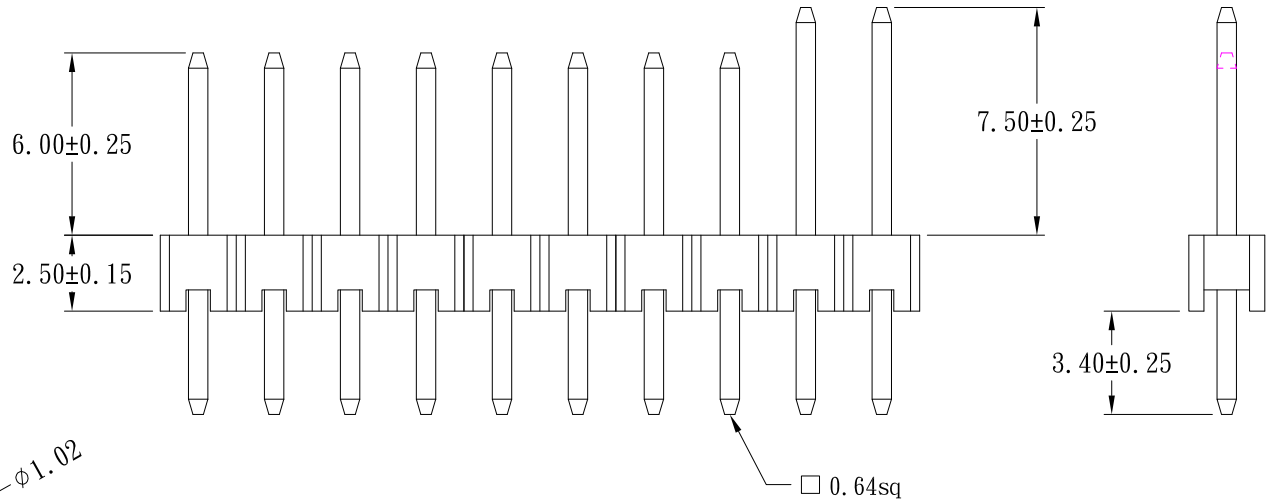


**SPECIFICATIONS**

Current Rating:  
3 Amp  
Voltage Rating:  
230V  
Insulator resistance:  
5000 Megohms Min.  
Contact resistance:  
20 m ohms Max.  
Dielectric withstanding:  
AC 500V/minute  
Operating Temperature:  
-40°~+105°C  
Contact Material:  
Brass  
Insulator Material:  
Nylon-9T  
+Glass Fiber  
UL94V-0  
Color:  
Black  
Contact Plated:  
Gold Flash  
Note:  
Appearance are completely  
match the rule of the  
products inspection procedure

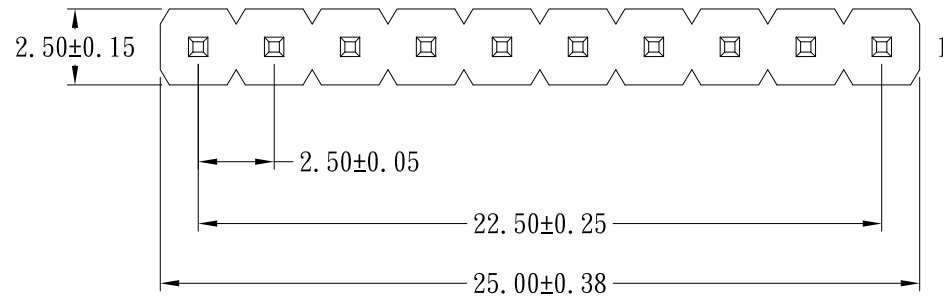

RECOMMENDED P. C. B. LAYOUT

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 3°

照片框

**ORDER INFORMATION**

**RX-D25607534-1X10C19-LF**

SERIES | LEADFREE  
DIP 180° | 1+8 PIN:6.0mm  
BASE 2.5mm | 9+10 PIN:7.5mm  
CONTACT 6.0+7.5mm

DESCRIPTION: 2.50mm Pin Header Right Angle Type