

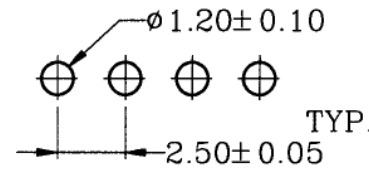
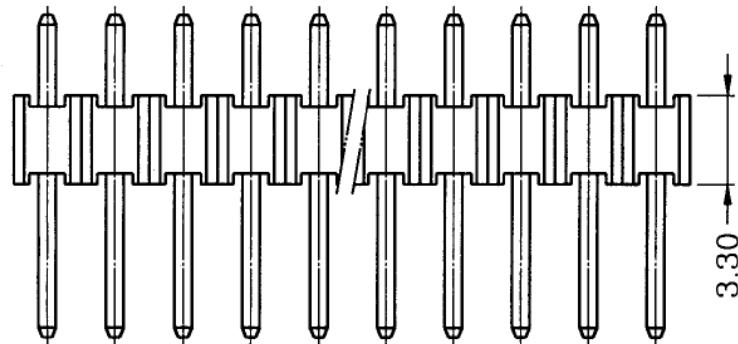


Material:*Insulator:Nylon 66 + 30% glass fiber UL 94V-0
 *Conatct:Brass,Tin plated.

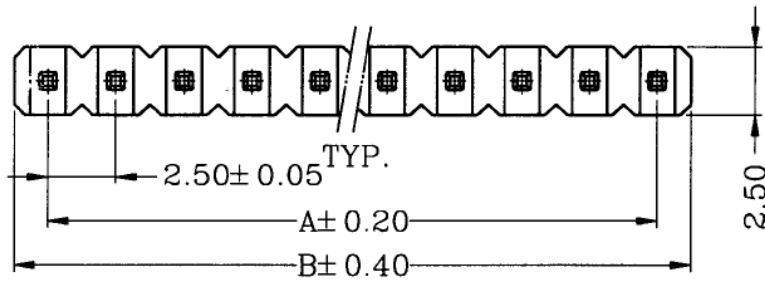

PCB LAYOUT

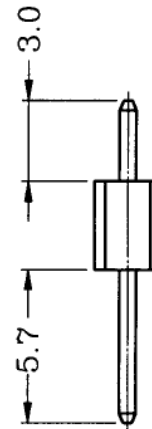

Ordering Information:

Circuits	Dimensions		PCS/BAG	Circuits	Dimensions		PCS/BAG
	A	B			A	B	
2	2.50	5.00	1000	20	47.50	50.00	500
3	5.00	7.50	1000	21	50.00	52.50	500
4	7.50	10.00	1000	22	52.50	55.00	500
5	10.00	12.50	1000	23	55.00	57.50	500
6	12.50	15.00	1000	24	57.50	60.00	500
7	15.00	17.50	1000	25	60.00	62.50	250
8	17.50	20.00	1000	26	62.50	65.00	250
9	20.00	22.50	1000	27	65.00	67.50	250
10	22.50	25.00	1000	28	67.50	70.00	250
11	25.00	27.50	1000	29	70.00	72.50	250
12	27.50	30.00	1000	30	72.50	75.00	250
13	30.00	32.50	500	31	75.00	77.50	250
14	32.50	35.00	500	32	77.50	80.00	250
15	35.00	37.50	500	33	80.00	82.50	250
16	37.50	40.00	500	34	82.50	85.00	250
17	40.00	42.50	500	35	85.00	87.50	250
18	42.50	45.00	500	36	87.50	90.00	250
19	45.00	47.50	500				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE


SIZE A4

PJECTION

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

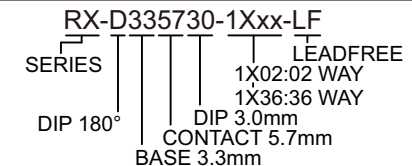

DESCRIPTION: 2.50mm Pin Header Single Row Straight Type

煜倫股份有限公司

www.morethanall.com