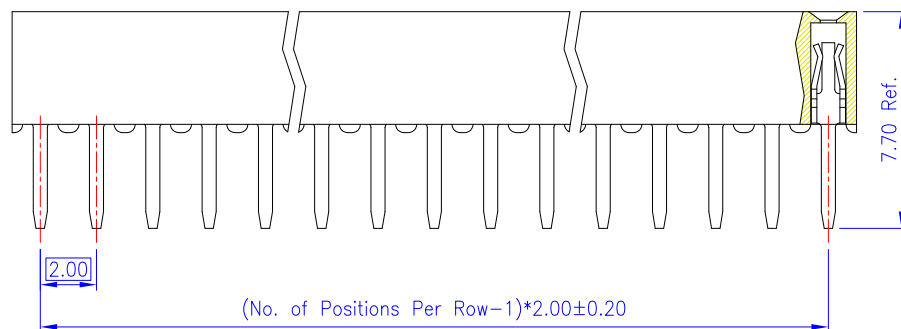
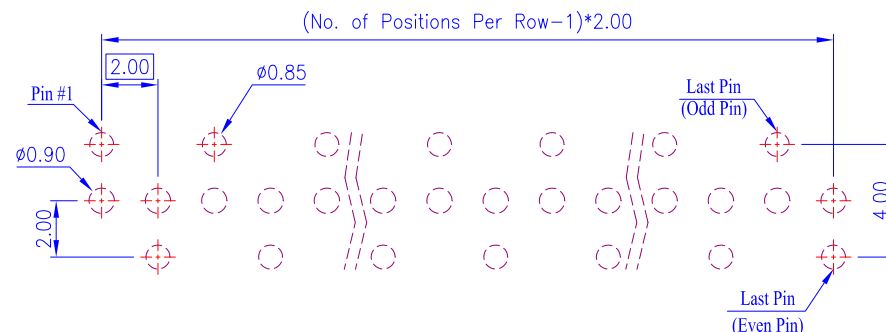
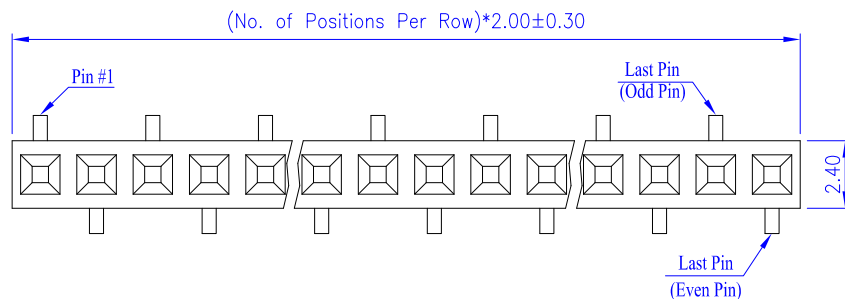


Material and Finish

1. Housing: Nylon 9T (UL94V-0), Black.
2. Terminal: Phosphor Bronze (t=0.20mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Connect Resistance: 30m Ohms Maximum.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

S-B40-1XxxR-LF
SERIES LEADFREE
R TYPE FOOT POSITION
1X02:02WAY
1X40:40WAY
BOTTOM ENTRY 4.0mm

DESCRIPTION:

2.00mm Post Header Receptacle
PCB Mount Vertical Type, Single Row Pass-Through Entry – 4.00mm (4.30*2.40mm)