

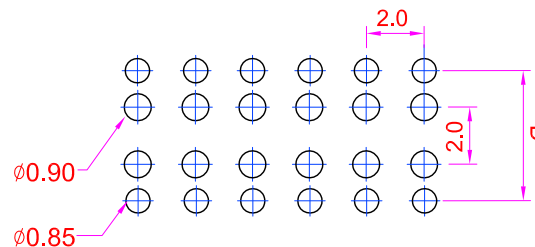


Recommended P.C. Board Hole Layout



Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +125°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 Nylon-9T
 Contact Plated : See Option
 Standard: Full Gold Flash

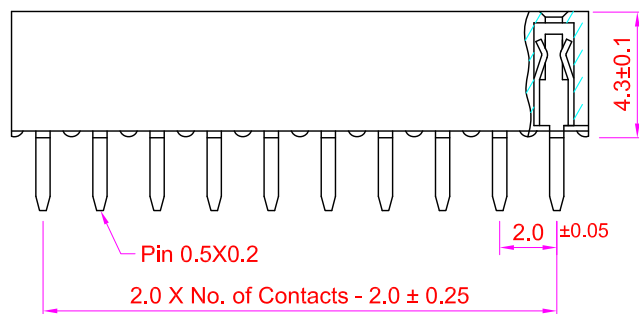

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-B50-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 BOTTOM ENTRY 5.0mm

DESCRIPTION: FEMALE HEADER 2.0*2.0mm STRAIGHT TYPE, DUAL ROWS HEIGHT 4.3mm