

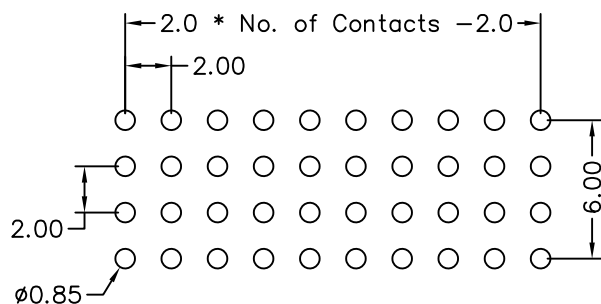


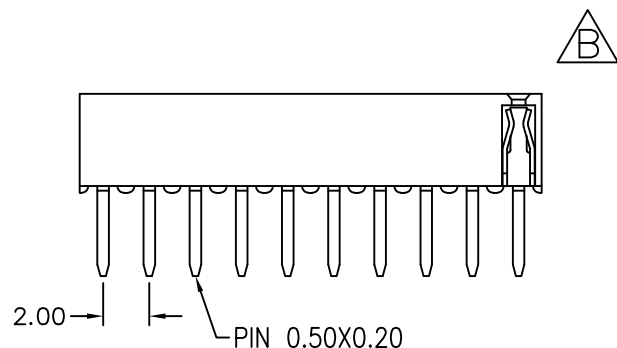

Recommended P.C.B Layout

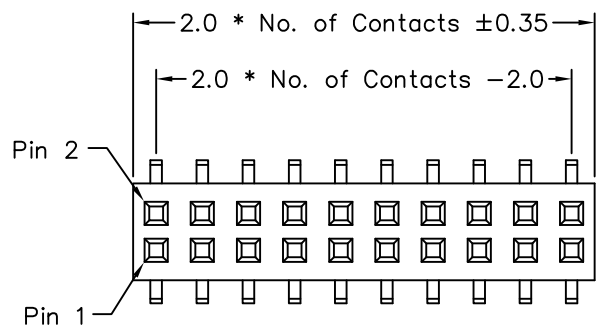

MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION


Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C ~ + 105°C



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

ORDER INFORMATION

S-B60-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
BOTTOM ENTRY 6.0mm

DESCRIPTION: FEMALE HEADER 2.0*2.0mm STRAIGHT TYPE, DUAL ROWS HEIGHT 4.3mm