
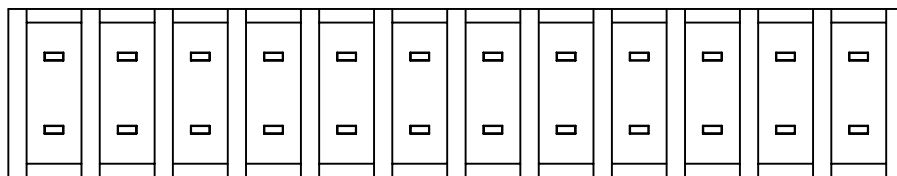
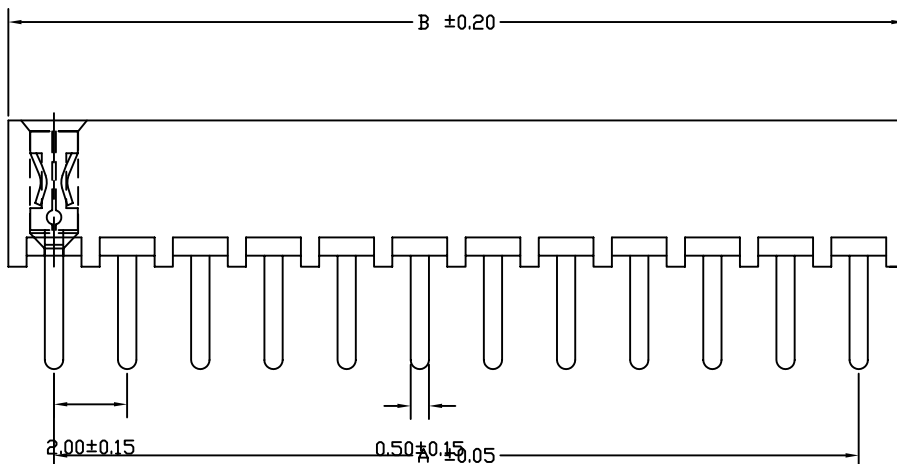




No. of Contacts	DIMENSIONS	
	A	B
6	4.00	6.50
8	6.00	8.50
10	8.00	10.50
12	10.00	12.50
14	12.00	14.50
16	14.00	16.50
18	16.00	18.50
20	18.00	20.50
22	20.00	22.50
24	22.00	24.50
26	24.00	26.50
28	26.00	28.50
30	28.00	30.50
32	30.00	32.50
34	32.00	34.50
36	34.00	36.50
38	36.00	38.50
40	38.00	40.50
42	40.00	42.50
44	42.00	44.50
46	44.00	46.50
48	46.00	48.50
50	48.00	50.50
52	50.00	52.50
54	52.00	54.50
56	54.00	56.50
58	56.00	58.50
60	58.00	60.50
62	60.00	62.50
64	62.00	64.50
66	64.00	66.50
68	66.00	68.50
70	68.00	70.50
72	70.00	72.50
74	72.00	74.50
76	74.00	76.50
78	76.00	78.50
80	78.00	80.50

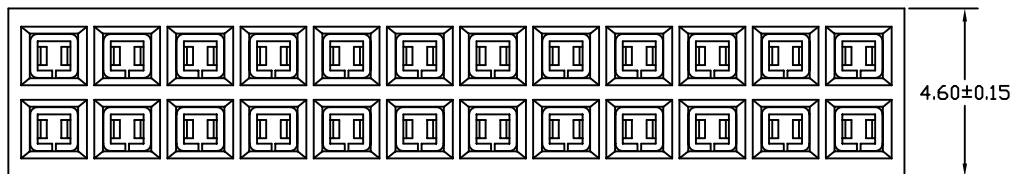

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold plated
 ©Standard: Gold flash all over

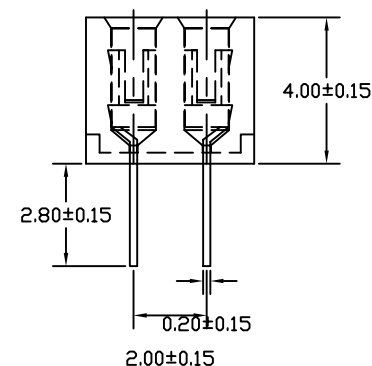

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-D40BC-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 BOX CONTACT
 HIGH 4.0mm
 DIP 180°

DESCRIPTION: