
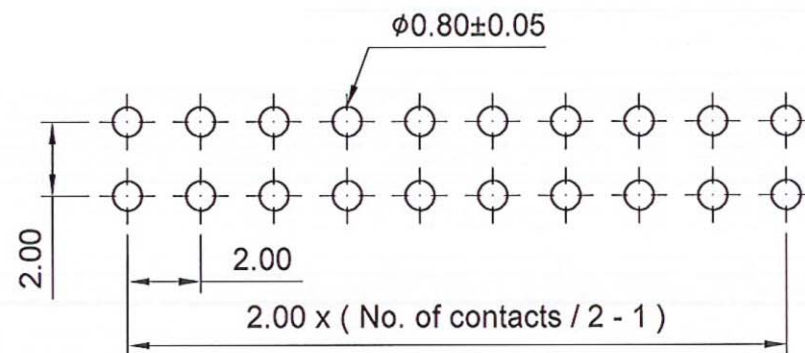

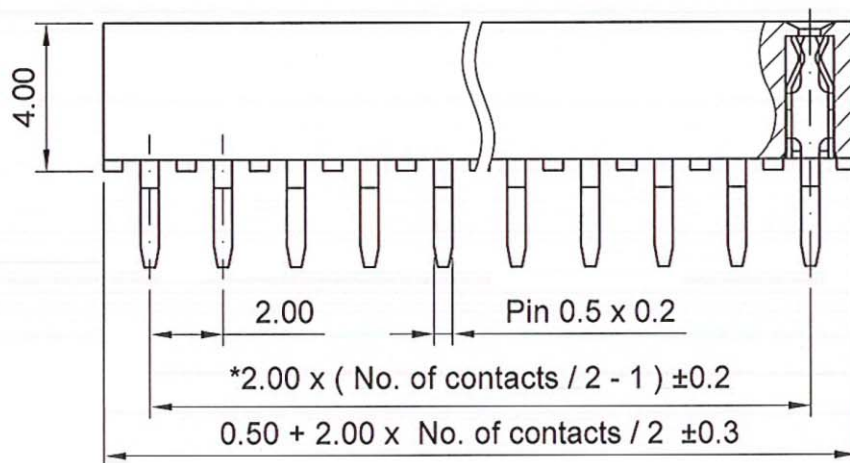


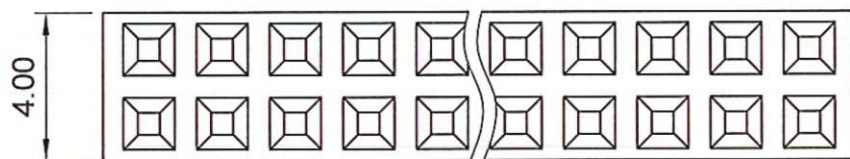

Recommended P.C.B. Layout

Specifications

Current & Voltage Rating : 2A & 20Vac max.

Insulation Resistance : 3000 MΩ min.

Contact Resistance : 20 mΩ max.

Dielectric Withstanding : AC 500 V

Operating Temperature : -40°C ~ +105°C

Max. Processing Temp. : 245±5°C for 3~5 seconds

Contact Material : Phosphor Bronze

Insulator Material : Nylon-6T / Nylon-6T (H.F.), 

UL 94V-0 (Black)

Finish : Gold plated

Packing : Tray

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

S-D40W4-2Xxx-LF
SERIES | LEADFREE
2X03:06WAY
2X50:100WAY
WIDTH 4.0mm
HIGH 4.0mm
DIP 180°

DESCRIPTION: