



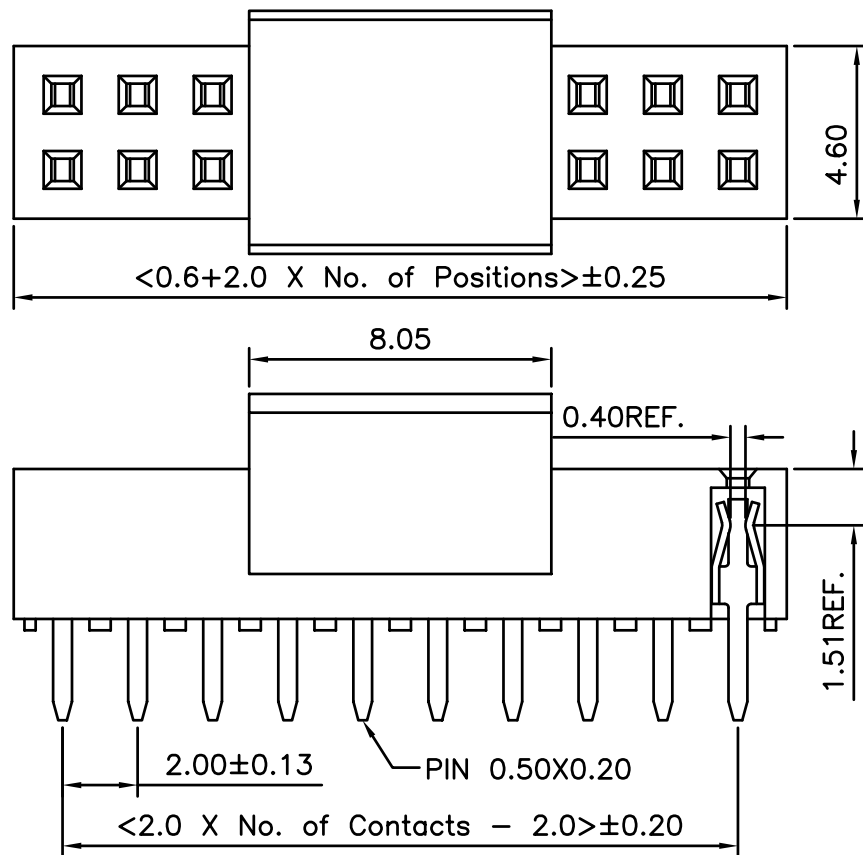

### Ordering Information

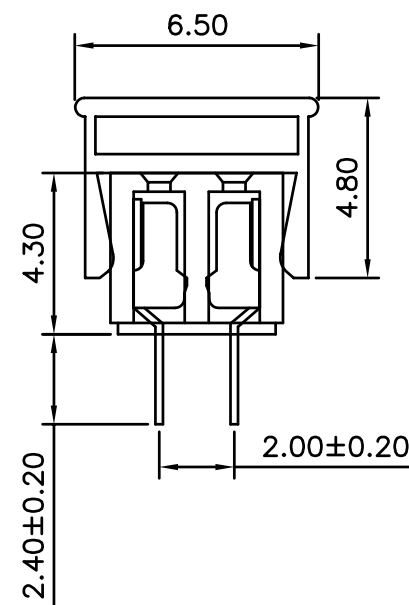


**Specifications**  
 Current Rating: 2Amp  
 Insulation Resistance: 1000M $\Omega$  Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 20m $\Omega$  Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be GP materials

### Recommended P.C.Board

Hole Layout  
 (Tolerance:  $\pm 0.05$ )

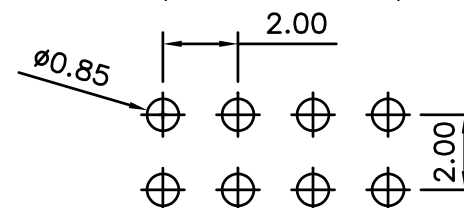

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm$   
 .X  $\pm$   
 .XX  $\pm$   
 .XXX  $\pm$   
 ANG  $\pm$

PPOJECTION

照片框

### ORDER INFORMATION

S-D43C-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04WAY  
 2X40:80WAY  
 CAP  
 HIGH 4.3mm  
 DIP 180°

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS DIP TYPE BASE 4.30H