
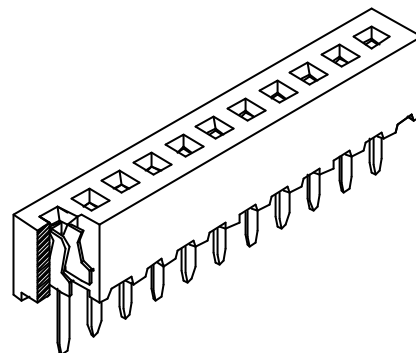
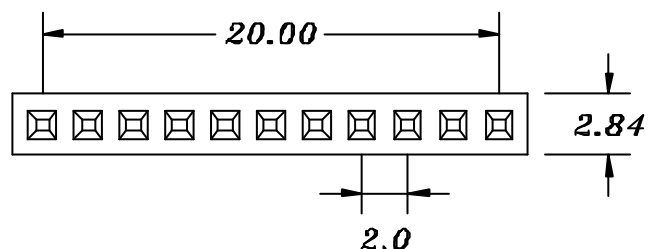


SPECIFICATIONS

Current Rating
Insulator resistance

1 Amp
5000 Megohms min .
500v DC for 1 minutes.
20 m ohm Max.
AC 500 v for 1 minutes.
-40 C ~ 105 C
Phosphor bronze
Polyester, UL 94v-0
standard P.B.S

Contact resistance
Dielectric withstanding
Operating Temperature
Contact Material
insulator Material

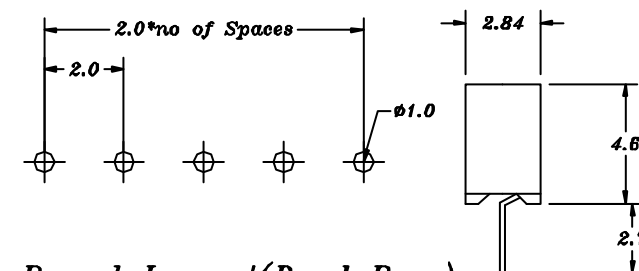

PC Board Layout(Dual Row)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-D46-1Xxx-LF
SERIES LEADFREE
1X02:02WAY
1X40:40WAY
HIGH 4.6mm
DIP 180°

DESCRIPTION: