

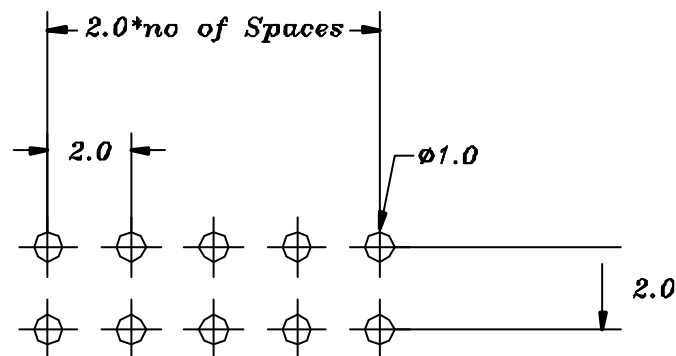
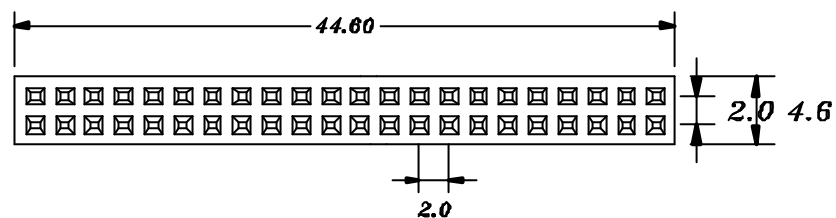
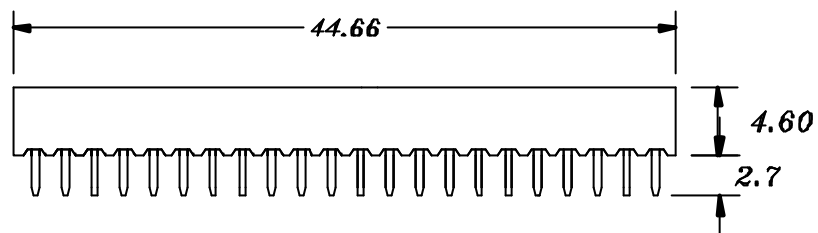





Pc Board Layout(Dual Row)

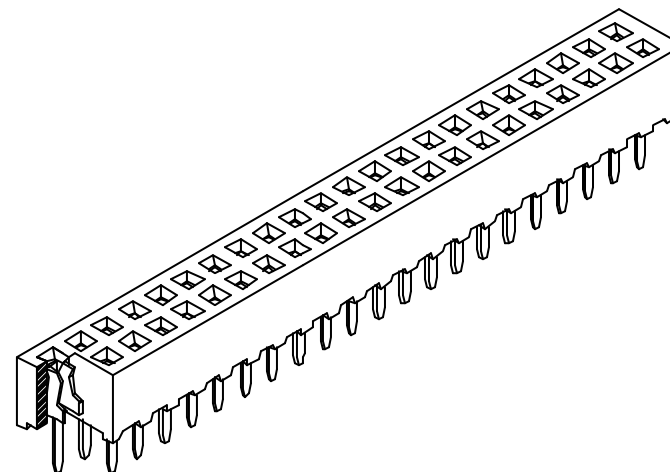

SPECIFICATIONS

Current Rating	1 Amp
Insulator resistance	500 Megohms min.
	500v DC for 1 minutes.
Contact resistance	20 m ohm Max.
Dielectric Withstanding	AC 500v for 1 minutes.
Operating Temperature	-40 C 105C
Contact Material	Phosphor bronze
Insulator Material	Polyester, UL 94V-0
	Standard P.B.T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-D46-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
HIGH 4.6mm
DIP 180°

DESCRIPTION: