

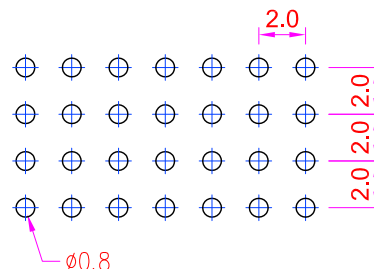


Recommended P.C. Board Hole Layout

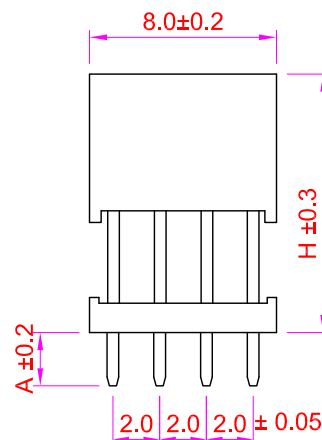

Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 NY9T
 Contact Plated : See Option
 Standard: Full Gold Flash

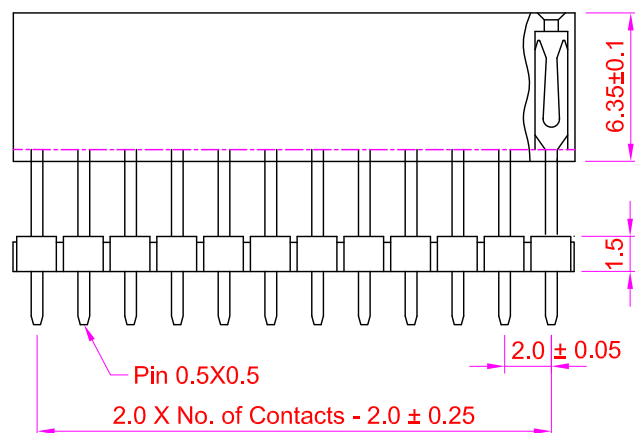

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-D93-4Xxx-LF
 SERIES | LEADFREE
 4X06:24WAY
 4X30:120WAY
 HIGH 9.3mm
 DIP 180°

DESCRIPTION: Female Header P:2.0 X 2.0mm
 Profile:6.35mm Stacking ,Quad Row, Straight Type