

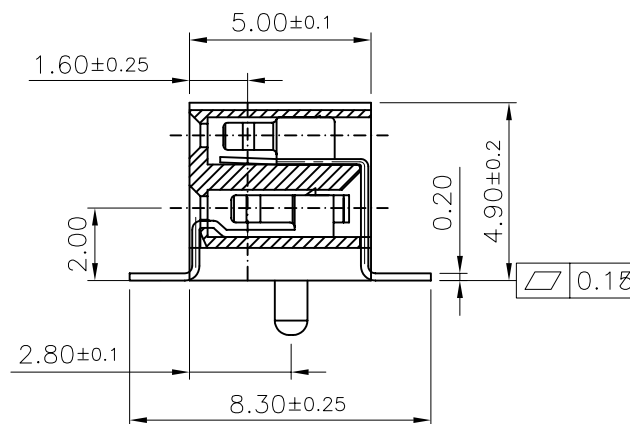
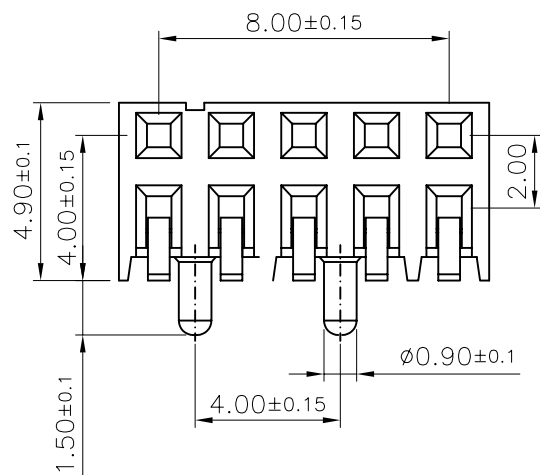


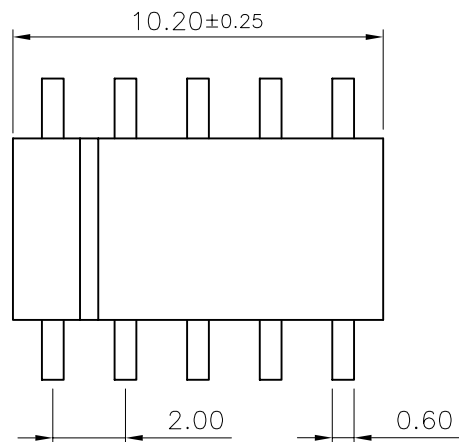

Side entry female header 2.0mm
pitch double row A Type

Technical Data :

Insulator Material : High Temperature Thermoplastic,UL 94V-0
Contact : stamped and formed,Phosphor Bronze
Plating : Selective gold flash plated
Current Rating : 1 Amp
Contact resistance : 20 milliohms Max.
Insulator resistance : 1000 Megohms min.
Dielectric withstanding : AC 500V for 1 Minute.
Operating Temperature : -40 °C to +105 °C.
Max. processing Temp : 230 °C for 30-60 seconds.
260 °C for 10 seconds.
Mates with : Pitch 2.0mm, □0.50mm male header
Packing : In Tape & Reel
RoHS Compliant

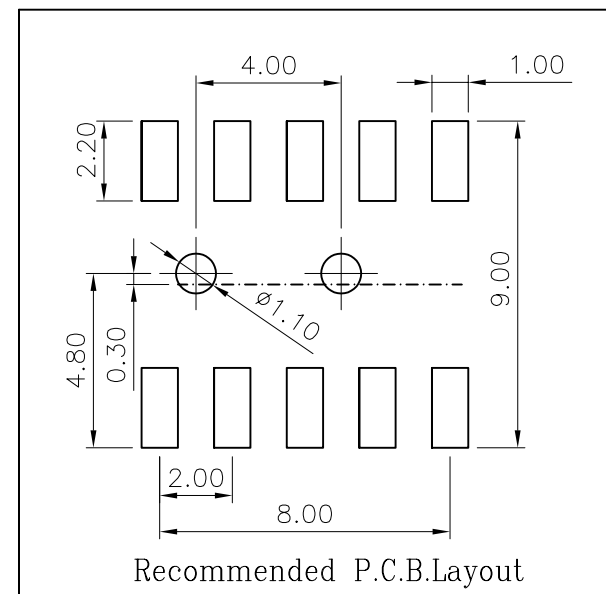

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.30
X, ± 0.25
.XX, ± 0.13
.XXX, ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-MP-2X05-LF
SERIES POST
LEADFREE
10 WAY
SIDE ENTRY SMT

DESCRIPTION: