
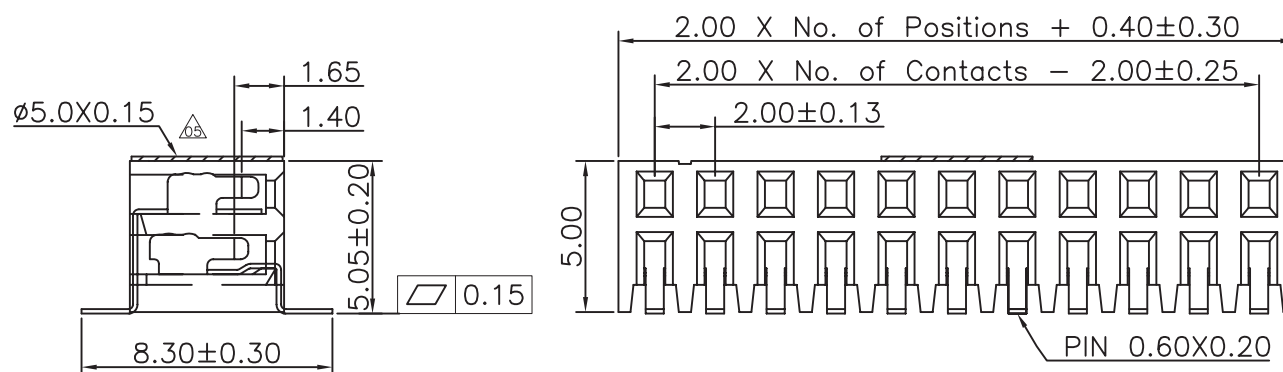


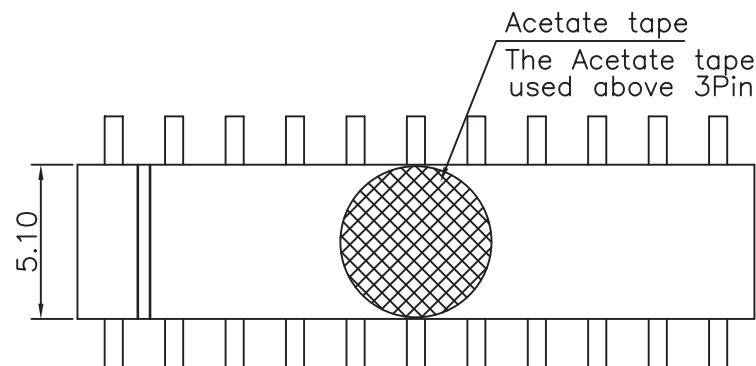

Specifications

Current Rating:2Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:20mΩMax.

Operating Temperature:−40°C to +105°C

Materials

Contact Material:Phosphor Bronze


Insulator Material:High Temperature

Thermoplastic, UL 94V−0 Nylon 6T

or the equivalent material

Recommended P.C.Board Layout

(Tolerance:±0.05)

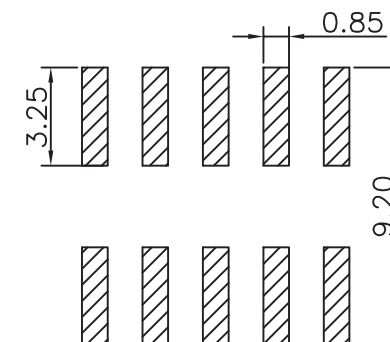

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15


.XXX ± 0.10

ANG ±

P PROJECTION

照片框

ORDER INFORMATION

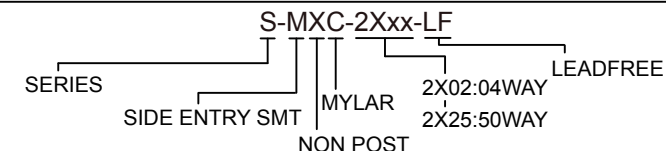

DESCRIPTION:2.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR