

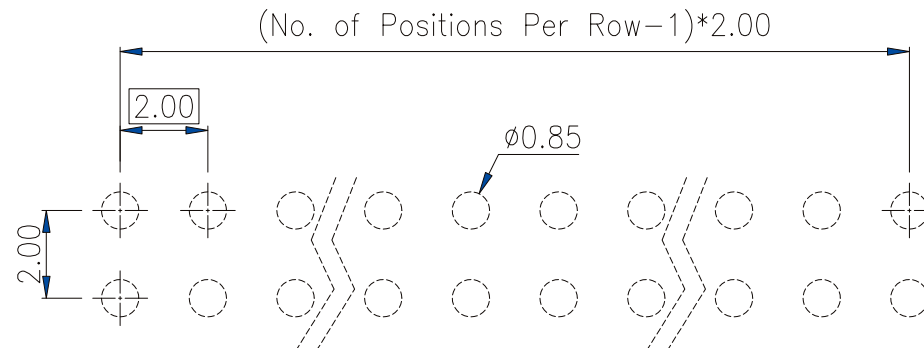


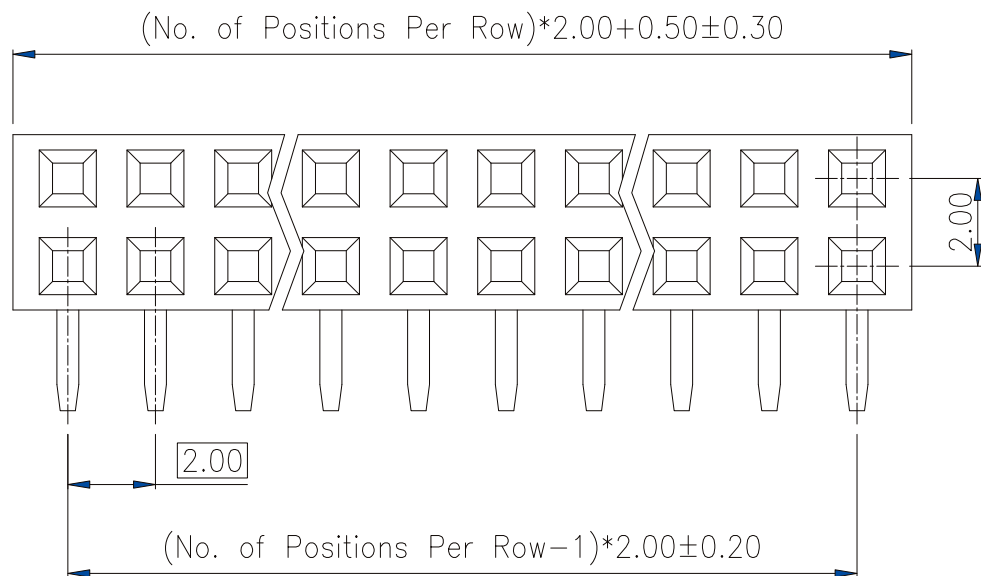

PCB Layout
(Top View)

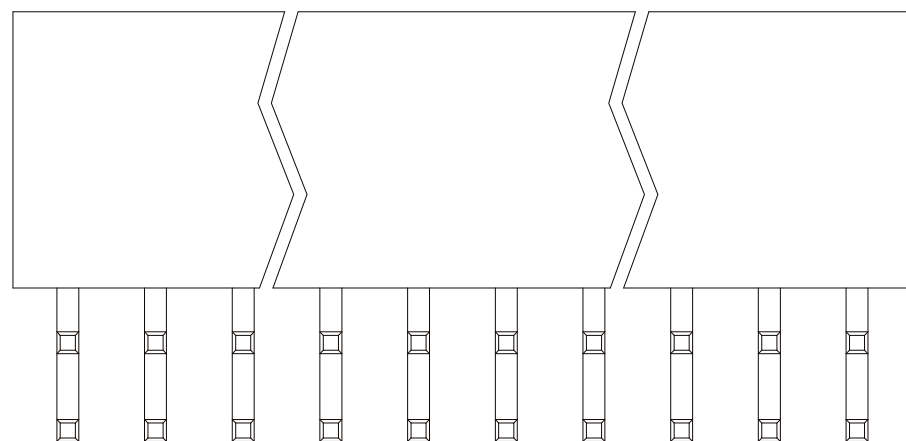

Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Copper Alloy (t=0.50mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 500V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

S-R63-2Xxx-LF
SERIES LEADFREE
2X03:06WAY
2X40:80WAY
LONG 6.3mm
DIP 90°

DESCRIPTION: 2.00 FEMALE HEADER
DUAL ROWS R/A DIP TYPE SIDE ENTRY