
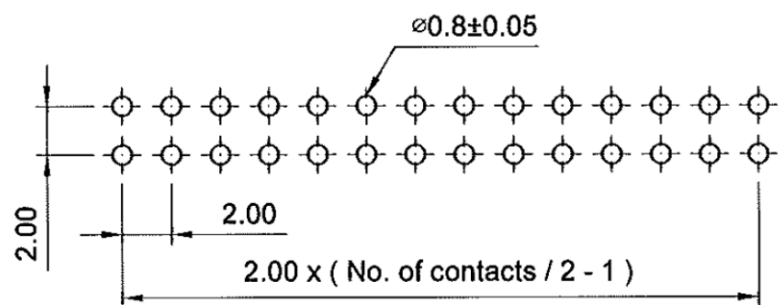
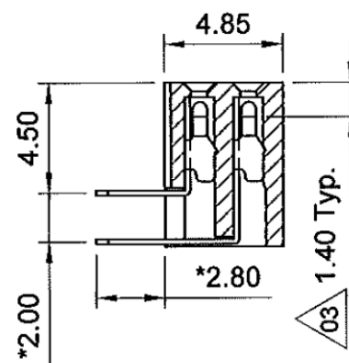
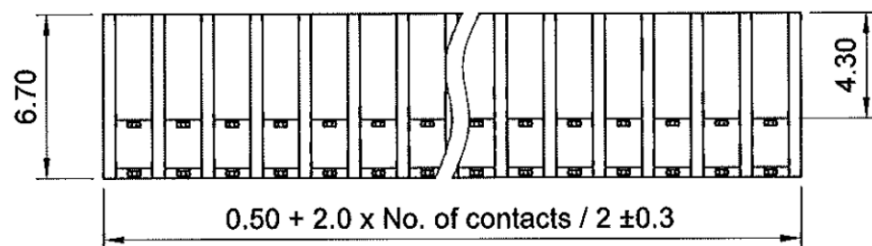


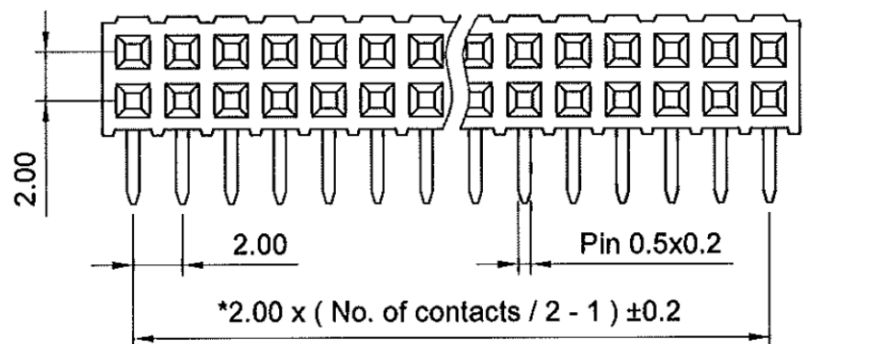

Recommended P.C.B. Layout

Specifications

Current & Voltage Rating : 2A & 20Vac max.

Insulation Resistance : 3000 MΩ min.

Contact Resistance : 20 mΩ max.

Dielectric Withstanding : AC 500 V

Operating Temperature : -40°C ~ +105°C

Max. Processing Temp. : 245±5°C for 3~5 seconds (NY6T)
260±10°C for 3~5 seconds (LCP)

Contact Material : Phosphor Bronze

Insulator Material : Nylon-6T / LCP, UL 94V-0 (Black) 02

Finish : 0.6μ" Gold plated on contact area

Packing : Tray / Tube 02

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±


DATE

.XXX, ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

S-R67-2Xxx-LF
SERIES | LEADFREE
DIP 90° | 2X03:06WAY
LONG 6.7mm | 2X40:80WAY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com