

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC




Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
Nylon-6T

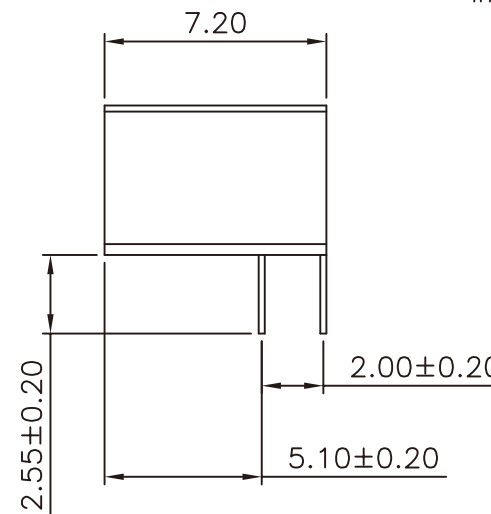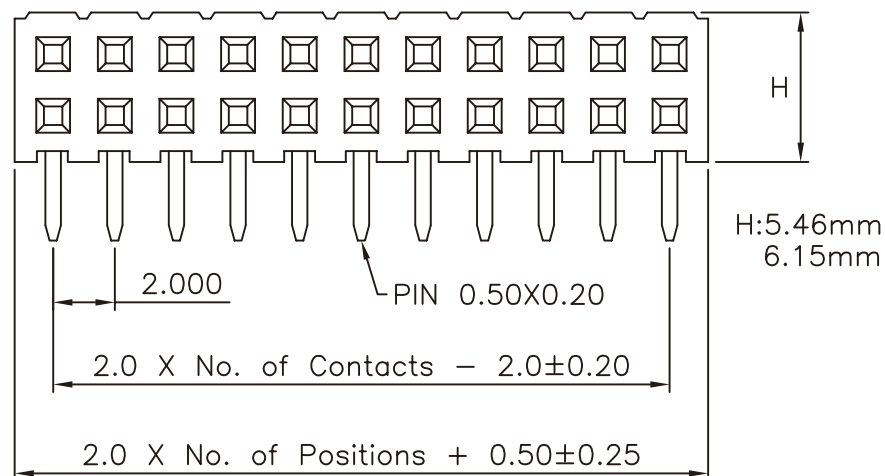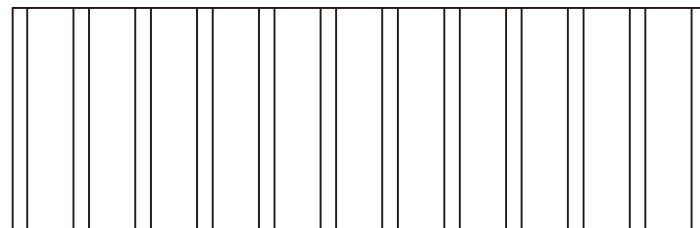

Recommended P.C.Board Hole Layout

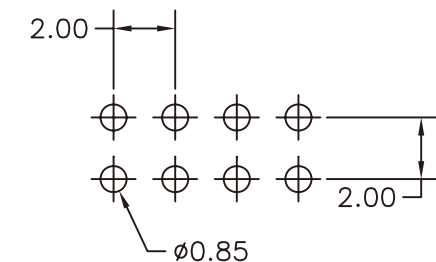

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

P PROJECTION



ORDER INFORMATION

S-R72xx-2Xxx-LF
SERIES
DIP 90°
LEADFREE
2X03:06WAY
2X40:80WAY
54:HIGH 5.46mm
61:HIGH 6.15mm
LONG 7.2mm

DESCRIPTION: 2.0 FEMALE HEADER DUAL ROWS R/A TYPE SIDE ENTRY