

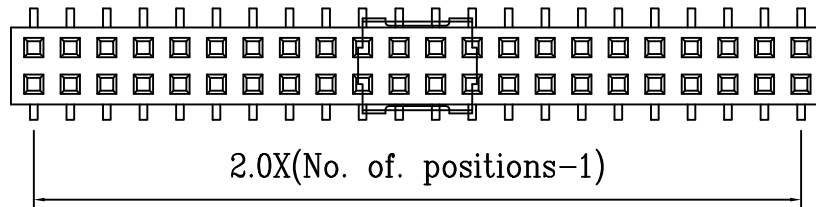
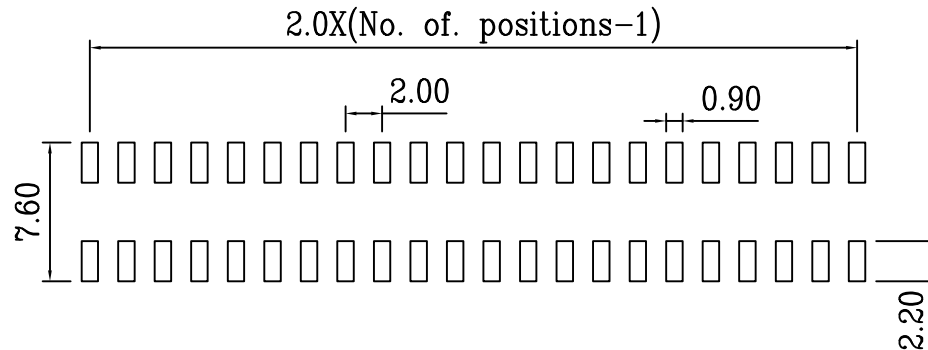


## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature:  $-40^{\circ}$ – $+105^{\circ}$ C
- \* Max Processing Temp:  $230^{\circ}$  for 30 seconds  
( $260^{\circ}$  for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)



$(2.0 \times \text{No. of positions}) + 0.5$

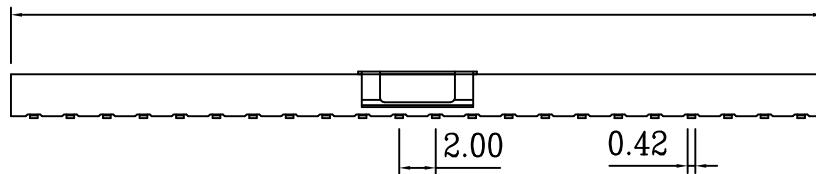

P.C.B. layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

**ORDER INFORMATION**

S-V24XC-2Xxx-LF  
SERIES  
LEADFREE  
2X03:06 WAY  
2X50:100 WAY  
CAP  
90°SMT NON POST  
HIGH 2.2mm

DESCRIPTION: 2.0mm Female Socket h=2.4mm type