
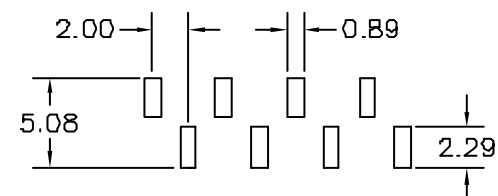
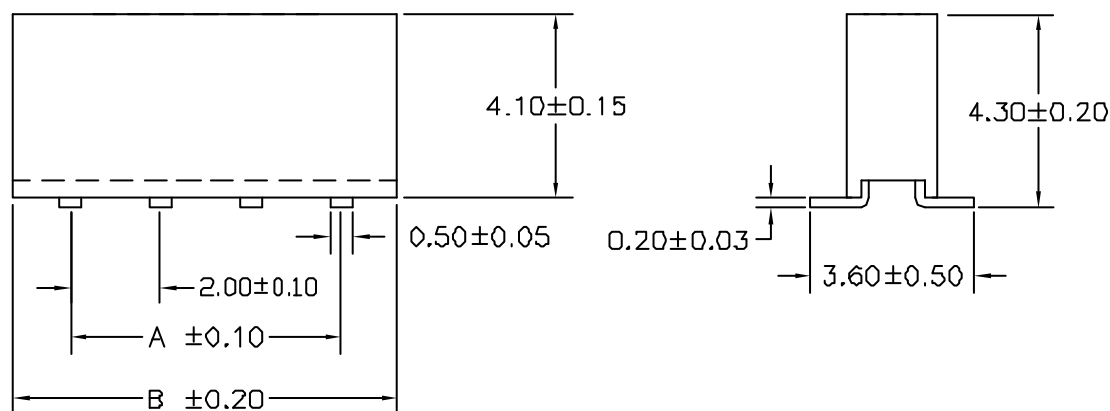


| No. of<br>Contacts | DIMENSIONS |       | REMARK<br>(備註) |
|--------------------|------------|-------|----------------|
|                    | A          | B     |                |
| 4                  | 6.00       | 8.50  | ○              |
| 5                  | 8.00       | 10.50 | ○              |
| 6                  | 10.00      | 12.50 | ○              |
| 7                  | 12.00      | 14.50 | ○              |
| 8                  | 14.00      | 16.50 | ○              |
| 9                  | 16.00      | 18.50 | ○              |
| 10                 | 18.00      | 20.50 | ○              |
| 11                 | 20.00      | 22.50 | ○              |
| 12                 | 22.00      | 24.50 | ○              |
| 13                 | 24.00      | 26.50 | ○              |
| 14                 | 26.00      | 28.50 | ○              |
| 15                 | 28.00      | 30.50 | ○              |
| 16                 | 30.00      | 32.50 | ○              |
| 17                 | 32.00      | 34.50 | ○              |
| 18                 | 34.00      | 36.50 | ○              |
| 19                 | 36.00      | 38.50 | ○              |
| 20                 | 38.00      | 40.50 | ○              |
| 21                 | 40.00      | 42.50 | ○              |
| 22                 | 42.00      | 44.50 | ○              |
| 23                 | 44.00      | 46.50 | ○              |
| 24                 | 46.00      | 48.50 | ○              |
| 25                 | 48.00      | 50.50 | ○              |

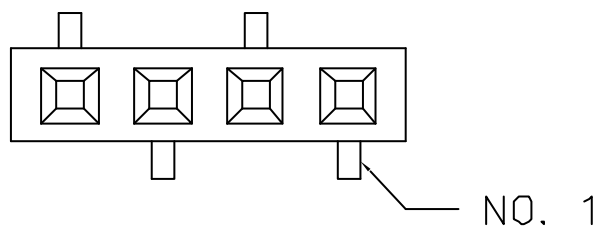

Recommended P.C.Board  
SMD Layout

## SPECIFICATIONS

Current Rating: 3 Amp   
 Insulator resistance: 5000 Megohms min.  
 Contact resistance: 20 m ohms max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°~+105°C  
 Max Processing Temp: 230° for 30 seconds  
 Contact Material: Phosphor Bronze.  
 Insulator Material: Polyester,UL 94V-0  
 ©Standard:Nylon-6T

Finish: Tin,Gold plated  
 ©Standard: Gold flash all over

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

## ORDER INFORMATION

S-V43-1XxxR-LF  
 SERIES LEADFREE  
 R TYPE FOOT POSITION  
 1X04:04WAY  
 1X25:25WAY  
 HIGH 4.3mm  
 180°SMT

DESCRIPTION:

www.morethanall.com