
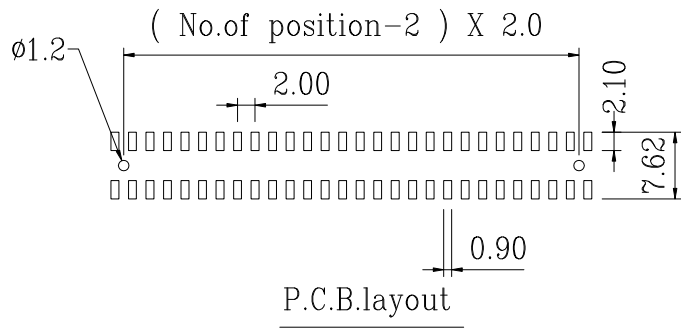



0.45

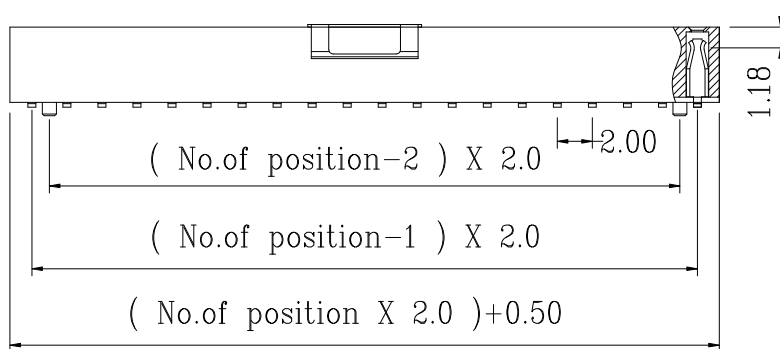

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P. (UL 94 V-0)

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.35
.XX ± 0.25
.XXX ± 0.05
ANG ±

ORDER INFORMATION

S-V43PC-2Xxx-LF

SERIES | | | | LEADFREE

180°SMT | | | | 2X03:06WAY

CAP | | | | 2X50:100WAY

POST | | | | HIGH 4.3mm

DESCRIPTION: 2.0mm Female Socket h=4.3mm SMD type