

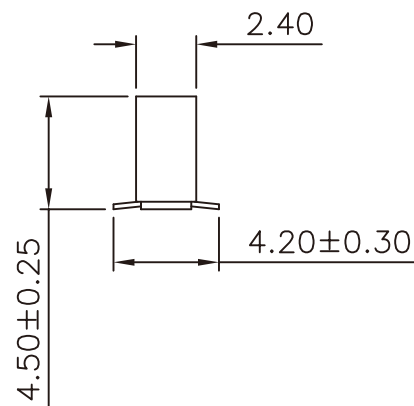
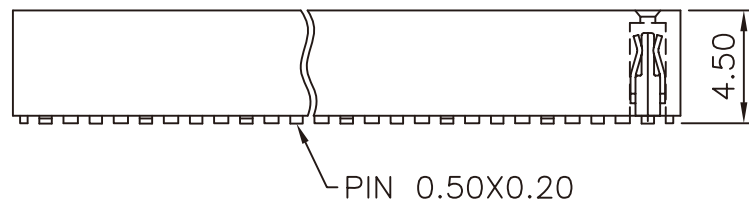


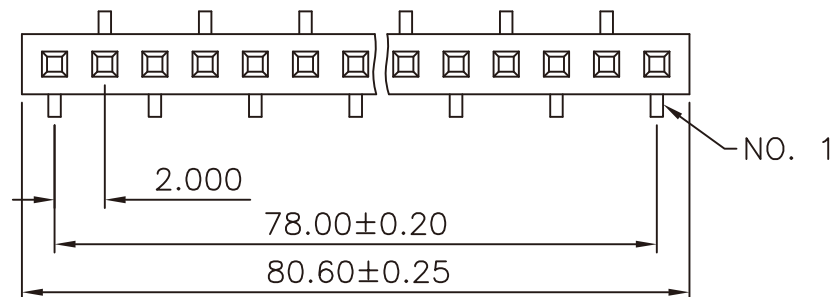

RECOMMENDED P.C.B LAYOUT

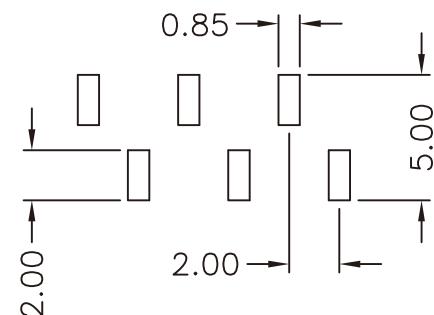

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
NYLON-6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

S-V45X-1XxxR-LF
SERIES
180°SMT
NON POST
HIGH 4.5mm
LEADFREE
R TYPE FOOT POSITION
1X02:02WAY
1X40:40WAY

DESCRIPTION: 2.00 FEMALE HEADER SINGLE ROW SMT TYPE BASE 4.30H