



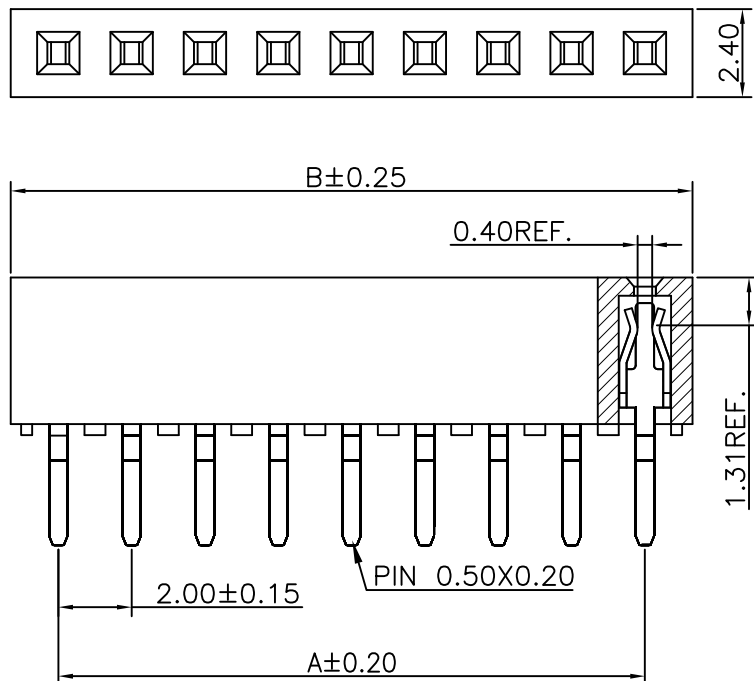

Recommended P.C.Board  
Layout  
(Tolerance:±0.05)

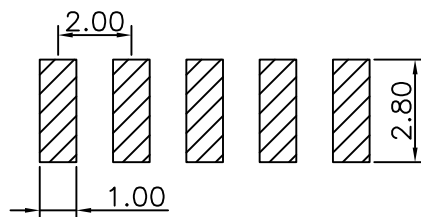

#### Specifications

Current Rating:2.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:20mΩMax.

Operating Temperature:−40°C to +105°C

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T

(Halogen Free) or the equivalent material

All materials must meet Greenconn

hazardous substances control standards.

| PART NO.    | A     | B     | Insulator Material     | Standard Packing |
|-------------|-------|-------|------------------------|------------------|
| S-W43X-1X02 | 2.00  | 4.60  | Nylon 6T(Halogen Free) | Box              |
| S-W43X-1X03 | 4.00  | 6.60  | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X04 | 6.00  | 8.60  | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X05 | 8.00  | 10.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X06 | 10.00 | 12.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X07 | 12.00 | 14.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X08 | 14.00 | 16.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X09 | 16.00 | 18.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X10 | 18.00 | 20.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X11 | 20.00 | 22.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X12 | 22.00 | 24.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X13 | 24.00 | 26.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X14 | 26.00 | 28.60 | Nylon 6T(Halogen Free) | Tube             |
| S-W43X-1X15 | 28.00 | 30.60 | Nylon 6T(Halogen Free) | Tube             |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

照片框

#### ORDER INFORMATION

S-W43X-1Xxx-LF  
SERIES | LEADFREE  
1X02:02 WAY  
1X15:15 WAY  
NON POST  
LONG 4.3mm  
90°SMT

DESCRIPTION: 2.00 FEMALE HEADER SINGLE ROW SMT TYPE BASE 4.30H