

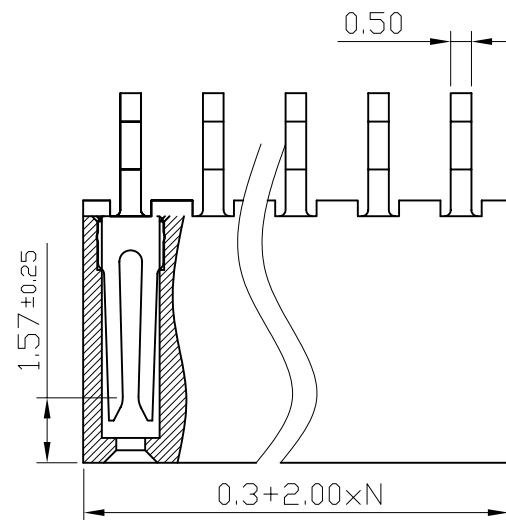
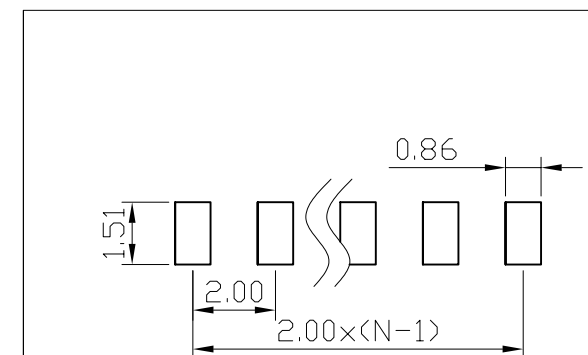


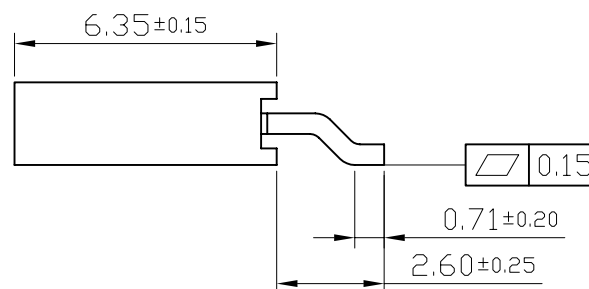

female header 2.0mm pitch H6.35 Horizontal SMT Type

Technical Data :

Insulator Material:	LCP,UL 94V-0
Color:	Black
Contact :	stamped and formed,Phosphor Bronze
Plating :	Full gold flash plated
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-55°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.
Mates with :	Pitch 2.0mm, □0.50mm male header
Packing :	Tube

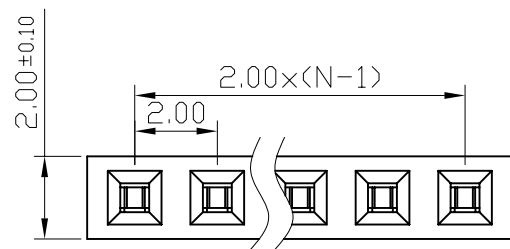

Recommended P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-W63X-1Xxx-LF
SERIES LEADFREE
1X02:02 WAY
1X31:31 WAY
NON POST
LONG 6.35mm
90°SMT

DESCRIPTION: