

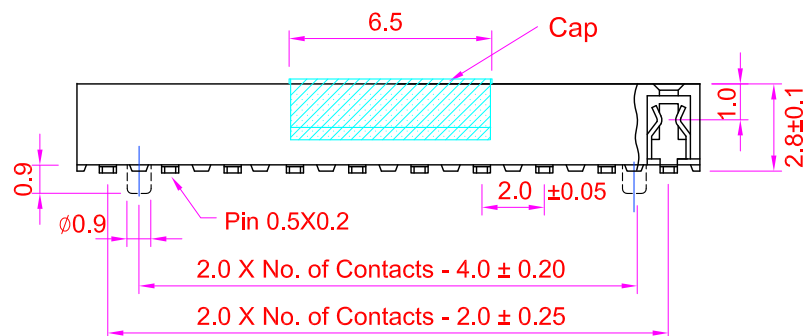


Recommended P.C. Board SMD Layout

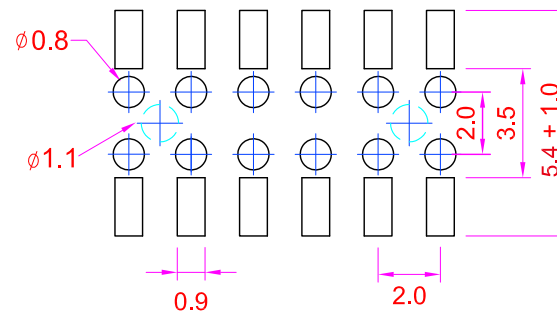

Specifications

Current Rating : 2 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 500V

Operating Temperature : -40°C ~ +125°C

Contact Material :Phosphor Bronze

Insulator Material : Polyester, UL 94V-0 NY9T

Contact Plated : See Option

Standard:Full Gold Flash

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

S-Z30PC-2Xxx-LF
SERIES POST CAP HIGH 3.0mm
BOTTOM ENTRY SMT
LEADFREE
2X02:04WAY
2X40:80WAY

DESCRIPTION: Female Header P:2.0 x 2.0mm Profile:2.80mm/W:4.0mm,Dual Row,SMD Type