
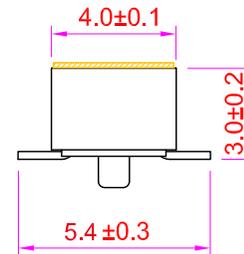
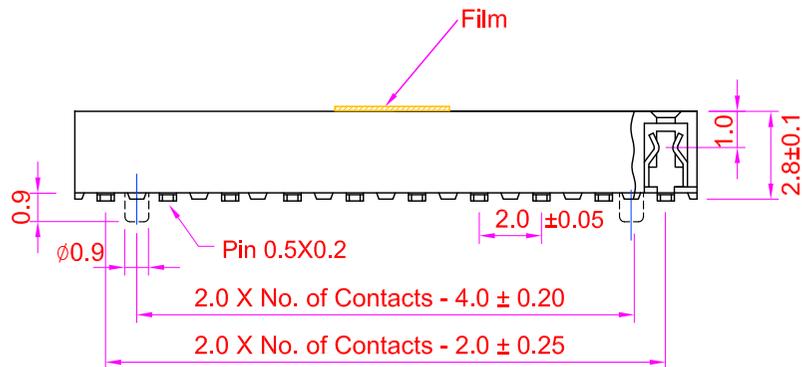
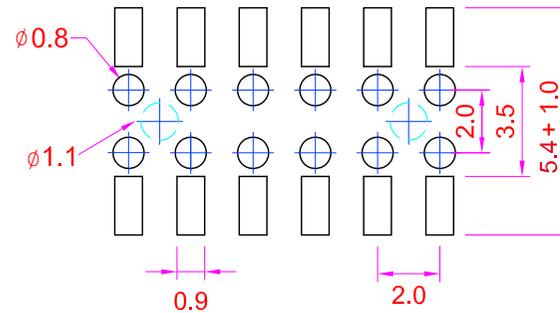


Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +125°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 NY9T
- Contact Plated : See Option
Standard: Full Gold Flash

**Recommended
P.C. Board SMD Layout**

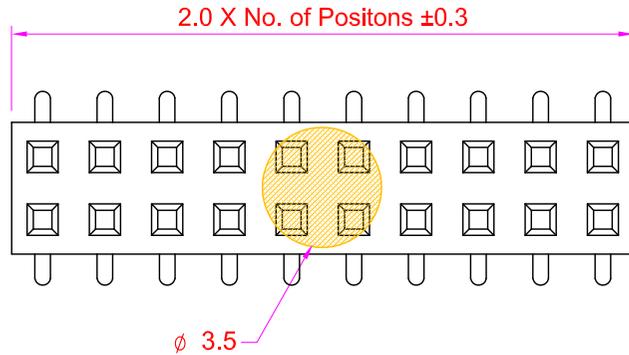

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±



P PROJECTION

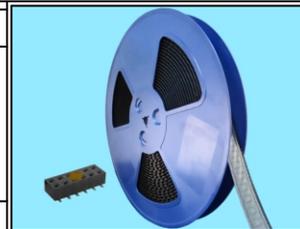

ORDER INFORMATION

S-Z30PC1R-2Xxx-LF
 SERIES | | | | LEADFREE
 | | | | 2X02:04WAY
 | | | | 2X40:80WAY
 BOTTOM ENTRY SMT | REEL
 HIGH 3.0mm | MYLAR
 POST

DESCRIPTION:

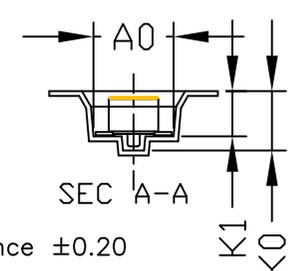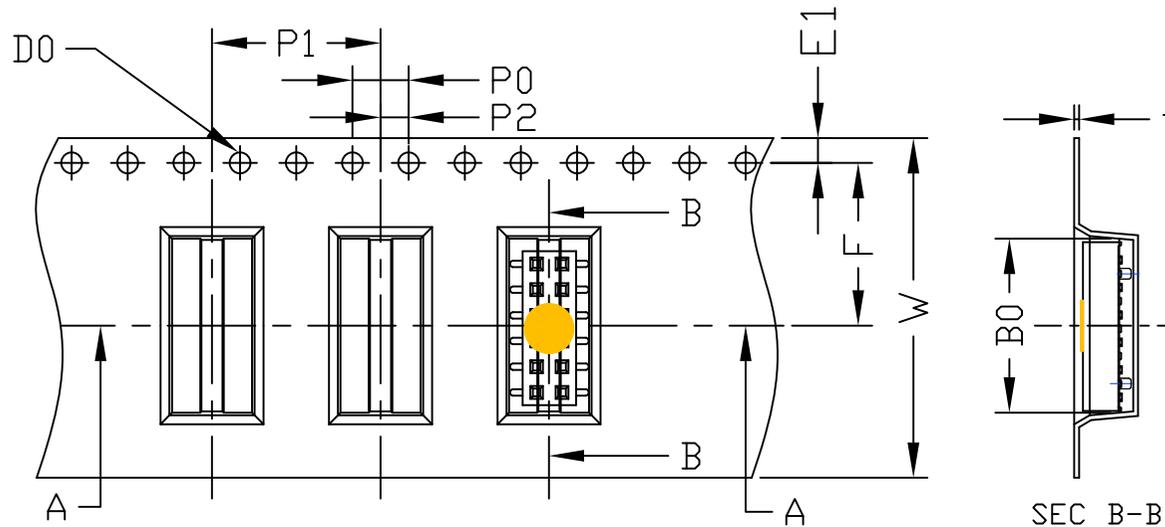

1. 10 sprocket hole pitch cumulative tolerance ± 0.20
2. Camber not to exceed 1mm in 100mm
3. A0 and B0 measured on a plane 0.30mm above the bottom of the pocket
4. K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
5. pocket position relative to sprocket hole measured as true position of pocket, not pocket hole
6. Component load per 13" reel: 1000pcs


A0	5.70±0.10
B0	12.30±0.10
K0	4.20±0.10
K1	3.20±0.10
W	24.00±0.30
t	0.35±0.05
E1	1.75±0.10
E2	
F	11.50±0.10
P0	4.00±0.10
P1	12.00±0.10
P2	2.00±0.10
D0	$\phi 1.50^{+0.10}_{-0.00}$
D1	

RoHS Compliant


TOLERANCES ARE



DRAWING BY CY		X. ± 0.50
CHECKED BY GENIUS		.X ± 0.20
UNIT / mm		.XX ± 0.10
SCALE 1:1	DATE	.XXX ±
		ANG ±

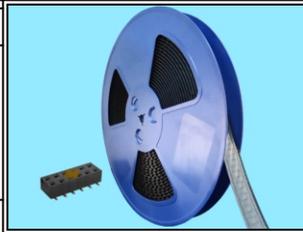

ORDER INFORMATION

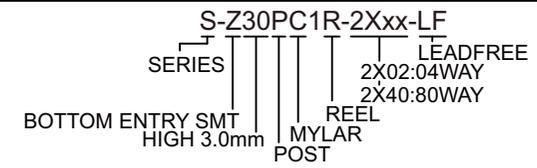

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: