
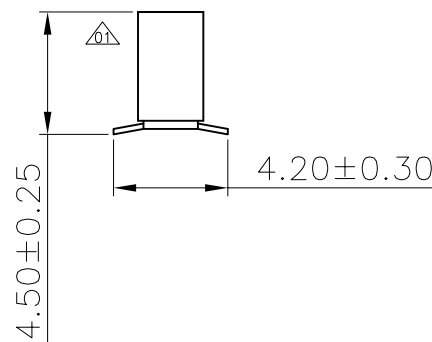
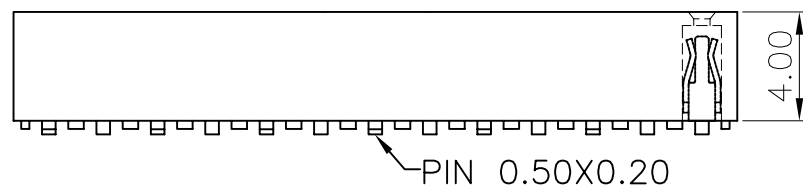


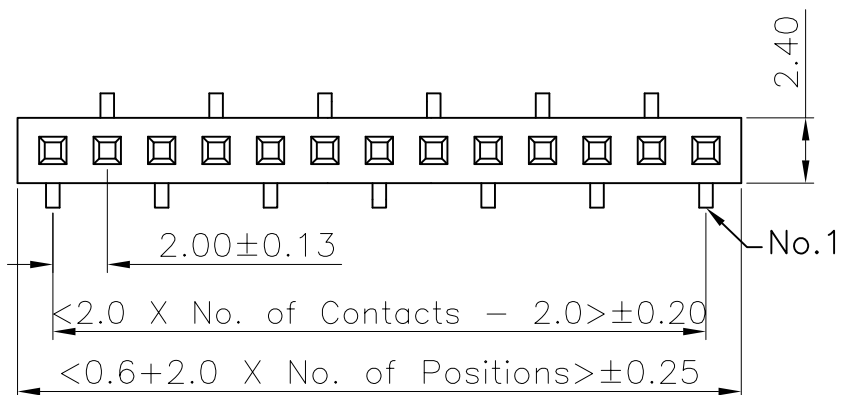

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to $+105^{\circ}\text{C}$

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
Nylon 6T

RECOMMENDED P.C.B LAYOUT

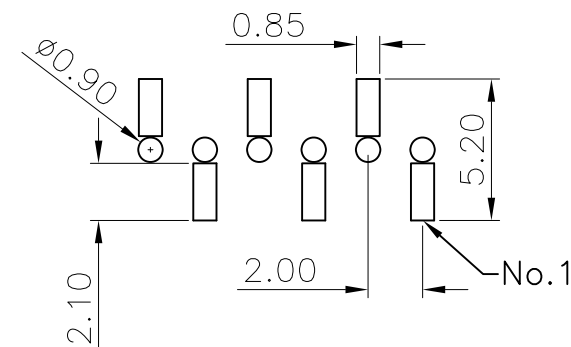

acetate tape	NOTE
5mm	03~25pins
10mm	26~40pins



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

S-Z45X-1XxxR-LF
SERIES
LEADFREE
R TYPE FOOT
2X02:04WAY
2X40:80WAY
NON POST
HIGH 4.5mm
BOTTOM ENTRY SMT

DESCRIPTION: 2.00 FEMALE HEADER SINGLE ROW SMT TYPE BASE 4.30H