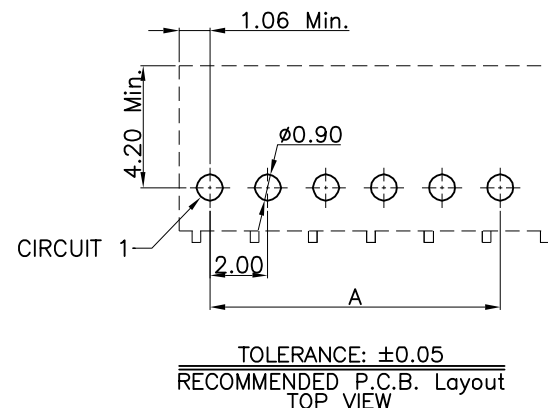

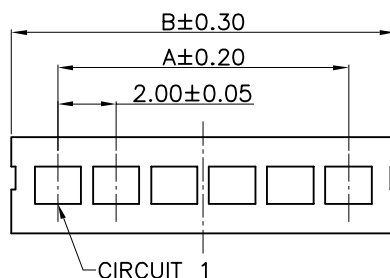
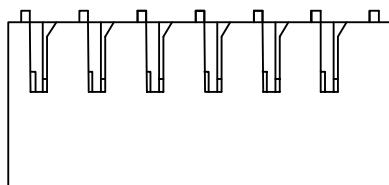


NOTES:
1. MATERIAL: (HF) NYLON 66, UL94V-0; COLOR: WHITE

PIN	DIM.(mm)		PIN	DIM.(mm)	
	A	B		A	B
02		5.20	10	18.00	21.20
03	4.00	7.20	11	20.00	23.20
04	6.00	9.20	12	22.00	25.20
05	8.00	11.20	13	24.00	27.20
06	10.00	13.20	14	26.00	29.20
07	12.00	15.20	15	28.00	31.20
08	14.00	17.20	16	30.00	33.20
09	16.00	19.20	0.00		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

SAR-H-xx-LF
SERIES | LEADFREE
02~16 WAY
HOUSING


DESCRIPTION: BOARD-IN, PLUG, PITCH 2.00mm, RIGHT ANGLE, CRIMP TYPE, INSULATOR




CONNECTOR




BAG



LABEL

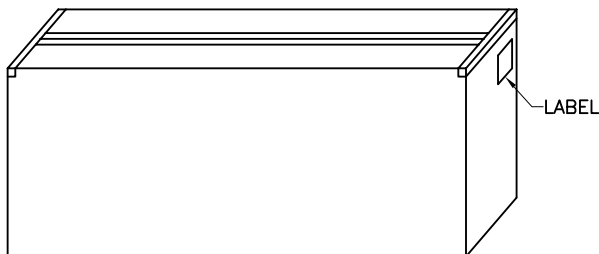

LABEL

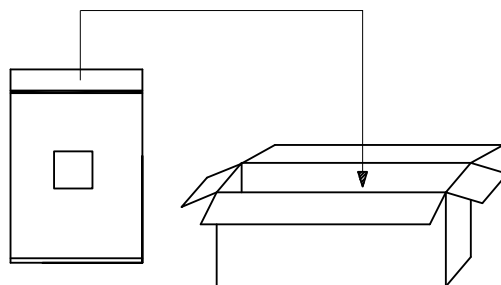

CARTON

NOTES:

1. MATERIAL:
CARTON: FIBREBOARD, CORRUGATED, DOUBLE WALL.
PE BAG: POLYETHYLENES, TRANSPARENT COLOR.
2. DIMENSION:
CARTON: 450 X 370 X 250 mm.

PACKING CAPACITY			
PIN	PCS/BAG	BAG/BC	PCS/BC
2	1000	120	120000
03~04	1000	100	100000
05~07	1000	80	80000
08~16	1000	50	50000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SAR-H-xx-LF
SERIES | T LEADFREE
02~16 WAY
HOUSING

DESCRIPTION: BOARD-IN, PLUG, PITCH 2.00mm, RIGHT ANGLE, CRIMP TYPE, INSULATOR