

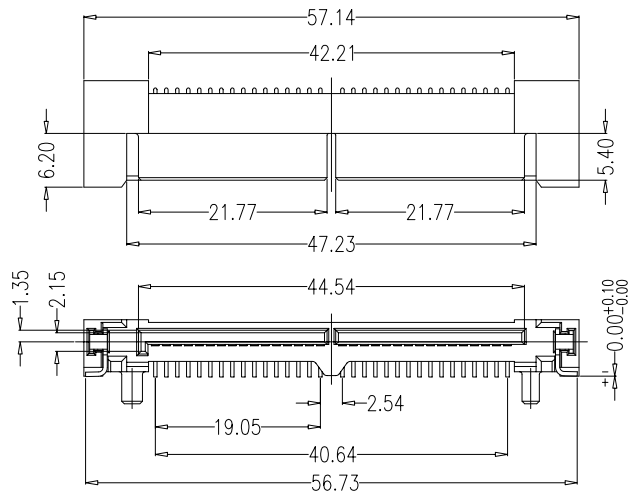




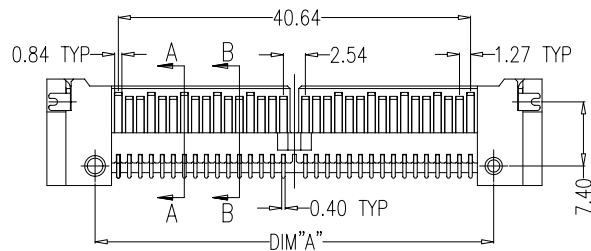


	DIM"A"
Short	46.00mm
Long	49.81mm




SECTION A-A

SECTION B-B

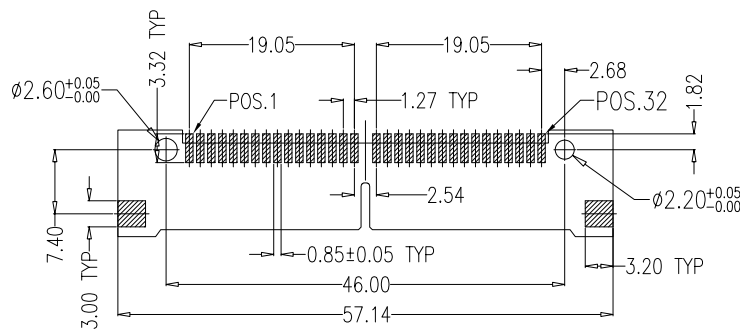

PCB LAYOUT
TOP VIEW



Product 3D Dwg

NOTES:

*Material

Housing: Nylon9T, UL 94V-0 rated, Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.
Harpoon: Brass;
Plating: Tin plating over Nickel.

*Mechanical

Insertion Force: 9.8N max.
Withdrawal Force: 1.96N min.
Durability: 500 cycles

*Electrical Specification

Current Rating: 1 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SAS-PWA65P-29-LF
SERIES | | | | LEADFREE
29 PIN
POST
HIGH 6.5mm
MALE | | | | UPPER CONTACT
90°SMT

DESCRIPTION: SAS 32P R/A SMT MALE