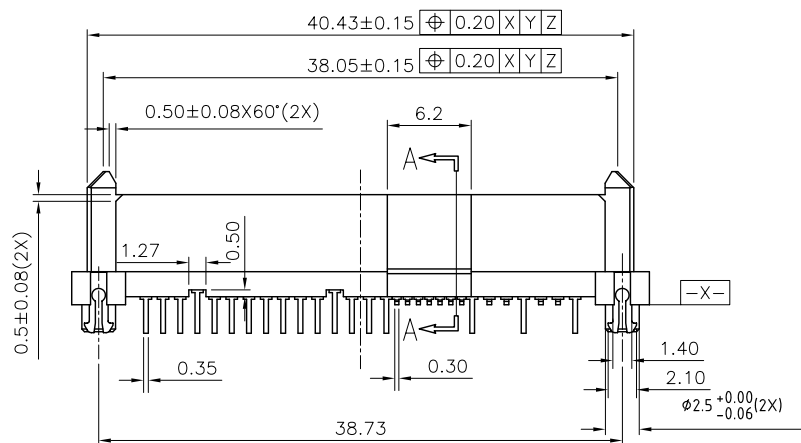

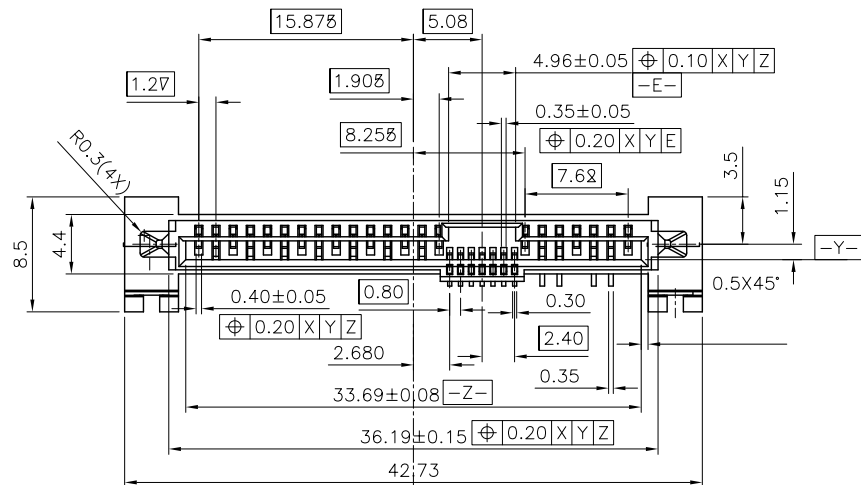


PART NO.	DIM A The length of DIP tail	DIM B The length of Post	DIM C The length of Forklock
	2.11	2.00	2.06

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°



PPOJECTION

照片框

ORDER INFORMATION

SAS-SDVPZ2-29-LF
SERIES
FEMALE
29 WAY
2 ROW
POST+CLIP
180°SMT
DIP 180°
LEADFREE

DESCRIPTION: HDD SAS CONN. RECEPTACLE SMT/DIP S/T TYPE

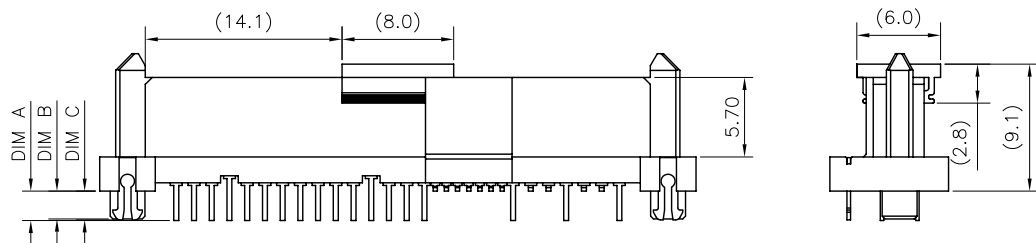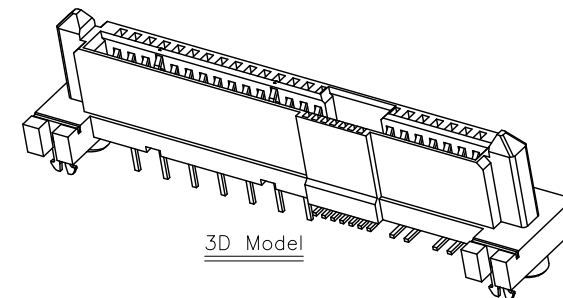[illegible]

3D Model

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FITTING NAIL: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:50u" MIN. NICKEL PLATING OVERALL,
100u" MIN MATT TIN PLATING ON SOLDER TAIL,
30u"GOLD PLATING ON CONTACT AREA.
 - 2.2 FITTING NAIL:50u" MIN. NICKEL UNDERPLATING OVERALL,
100u" MIN. MATT TIN OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C

PART NO.	DIM A	DIM B	DIM C
	The length of DIP tail	The length of Post	The length of Forklock
	2.11	2.00	2.06

照片框

SAS-SDVPZ2-29-LF

SERIES

LEADFREE

29 WAY

2 ROW

POST+CLIP

FEMALE

180°SMT

DIP 180°

DESCRIPTION:HDD SAS CONN. RECEPTACLE SMT/DIP S/T TYPE