


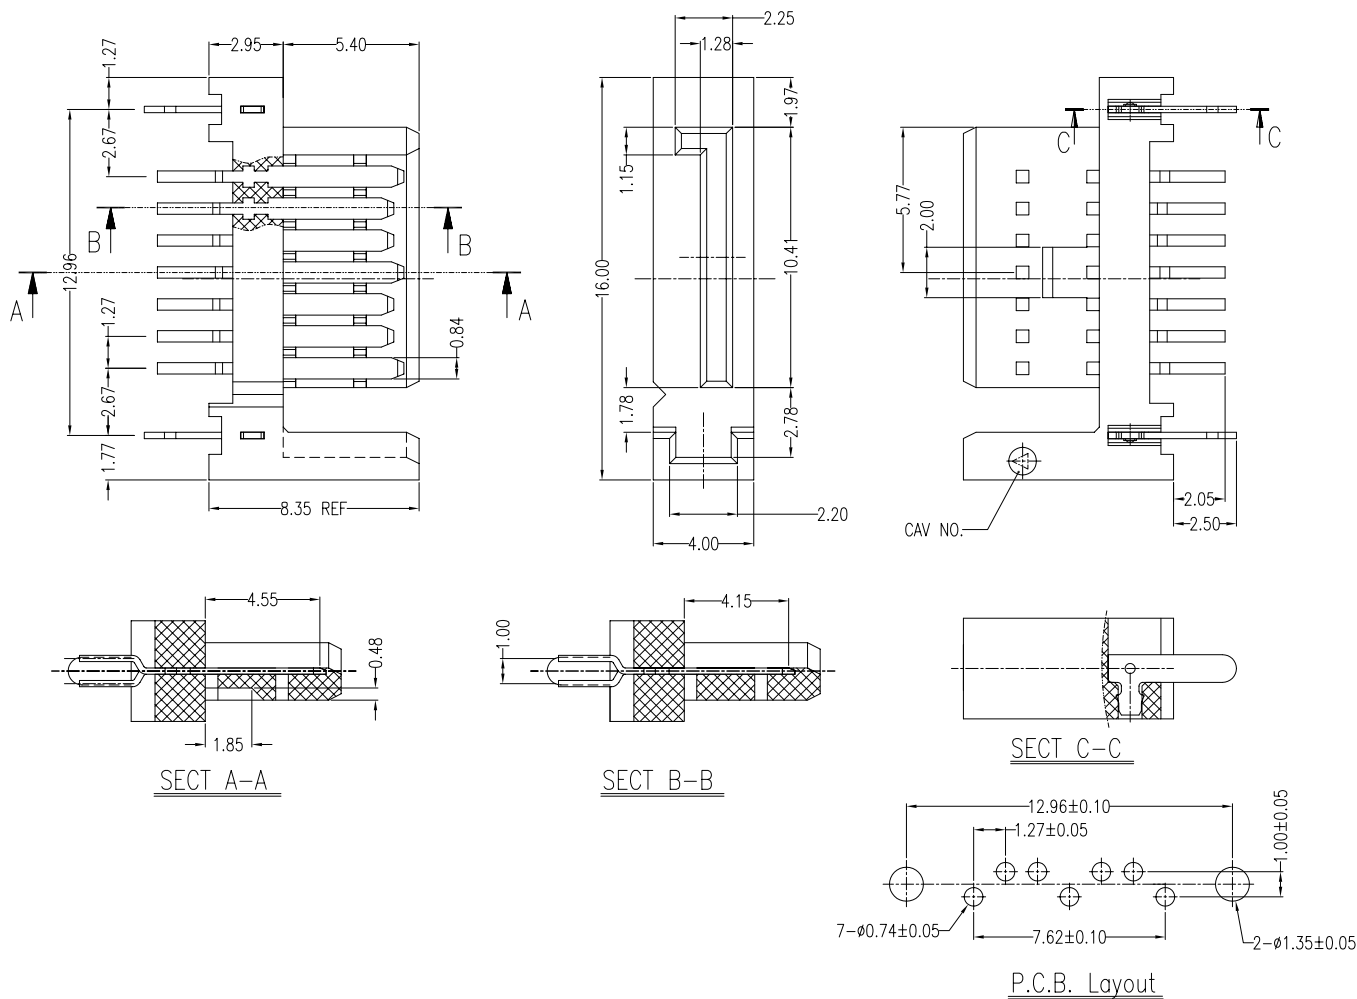

Notes:

*Material

Housing: LCP,UL 94V-0 rated, Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin plating on Solder Tail.

*Mechanical

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles.

*Electrical Specification

Current Rating: 1.5 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms minimum.
Dielectric Withstanding Voltage: 500 V AC.for 1minute at sea level

*Environmental

Operating Temperature: -55° C to +125° C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-PDR10M-07-LF
SERIES | | | | | LEADFREE
07 WAY
METAL
ROW/PITCH 1.0mm
MALE | RIGHT
DIP 180°

DESCRIPTION: Straight Serial ATA DIP A Type (Press Metal Straight Type)(High 2.05mm)