


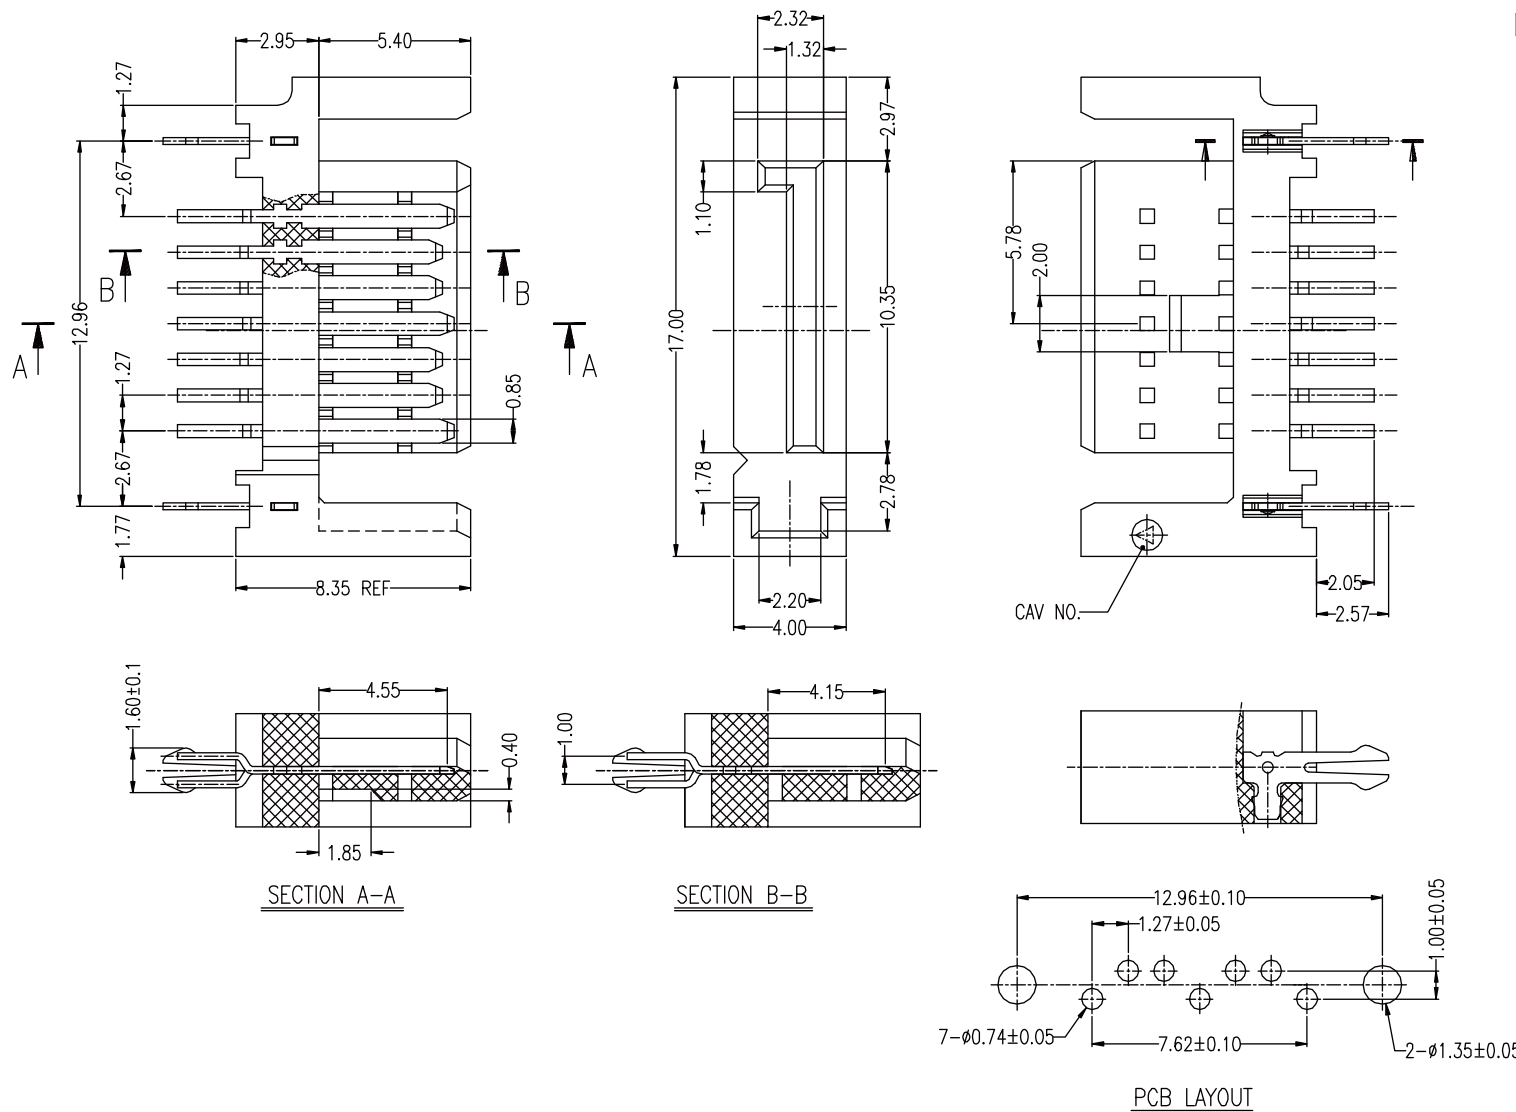

Notes:

*Material

Housing: LCP,UL 94V-0 rated,

Color: Black;

Contact: Brass;

Plating: Gold plating over Nickel on contact area; Tin/Lead plating on terminal.

*Mechanical

Insertion Force: 45N max.

Withdrawal Force: 10N min.

Durability: 500 cycles.

*Electrical Specification

Current Rating: 1.5 Ampere per contact;

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 1000 megohms min.

Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: -55°C to +125°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ± 0.38

.XX ± 0.25

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

SATA-PDR10ZB-07-LF

SERIES LEADFREE

MALE 07WAY

DIP 180° CLIP B TYPE

RIGHT ROW/PITCH 1.0mm

DESCRIPTION: SATA 7Pin 直立DIP A型(2.05mm)(鑲入氣叉型)