NOTES:

1. MATERIAL:
   HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL 94V-0
   COLOR: BLACK
   CONTACT: BRASS
   BOARDLOCK: BRASS

2. FINISH:
   CONTACT: GOLD PLATING ON CONTACT AREA
   100μ" MIN. TIN PLATING ON SOLDERTAILS
   50μ" MIN. NICKEL UNDERPLATING OVER ALL
   BOARDLOCK: 100μ" MIN. TIN PLATING ON SOLDERTAILS
   50μ" MIN. NICKEL UNDERPLATING OVER ALL

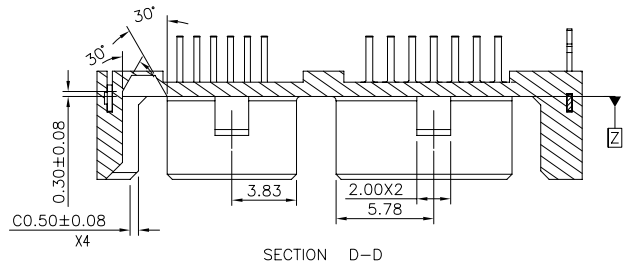

SECTION D-D



SECTION A-A

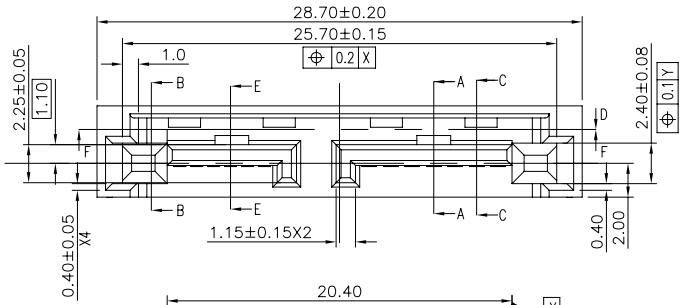



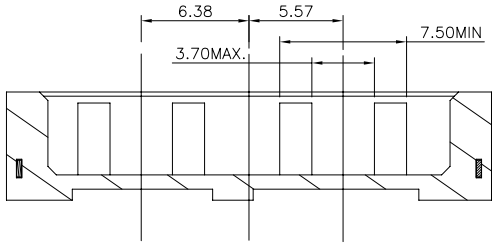

SECTION F-F

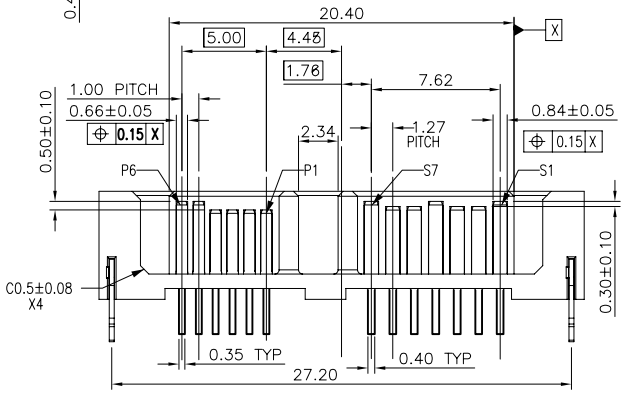



SECTION C-C

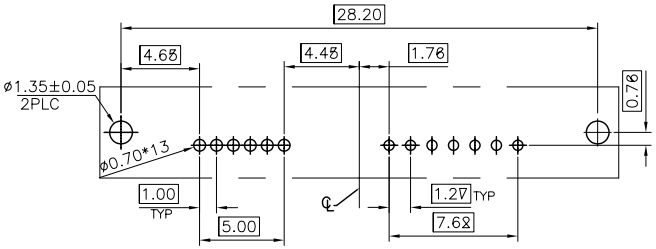

RECOMMEND PCB LAYOUT
PCB TOLERANCE:±0.05



SECTION B-B



SECTION E-E

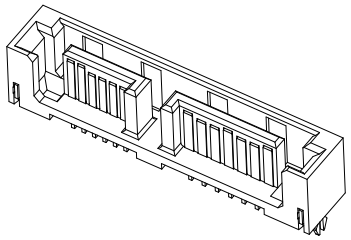

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

SATA-PDZ-7+6-LF

- SERIES
- MALE
- DIP 180°
- CLIP
- 7+6 WAY
- LEADFREE

DESCRIPTION: SLIM SERIAL ATA CONNECTOR, 7 POS. W/ 6POS, PLUG, VERTICAL, DIP TYPE.