





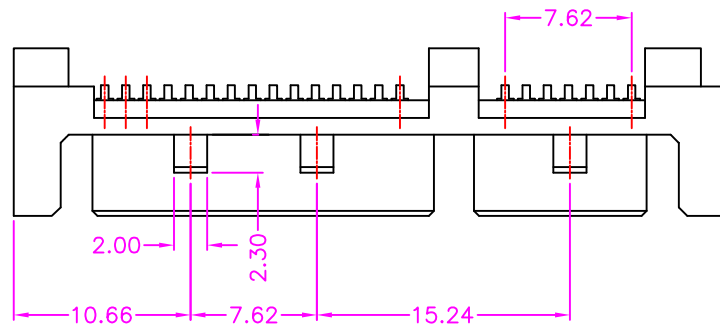


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
BOARDLOCK: COPPER ALLOY, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

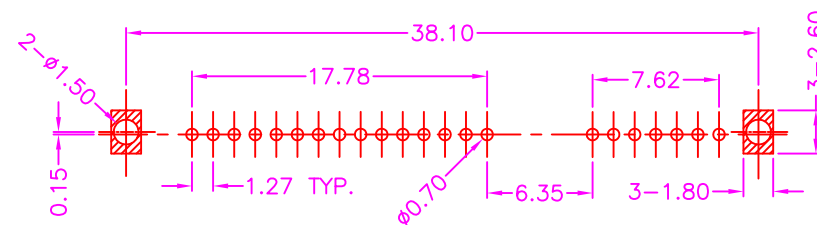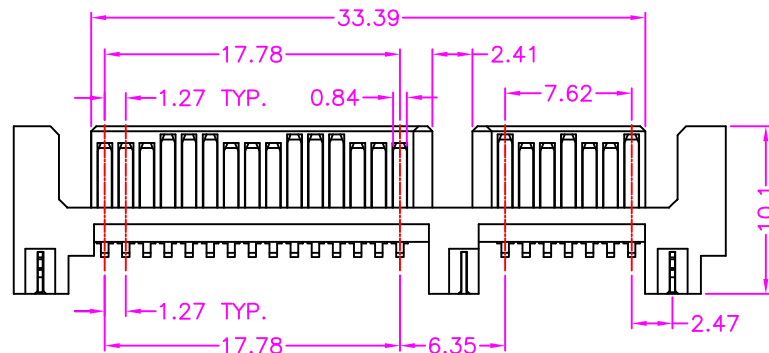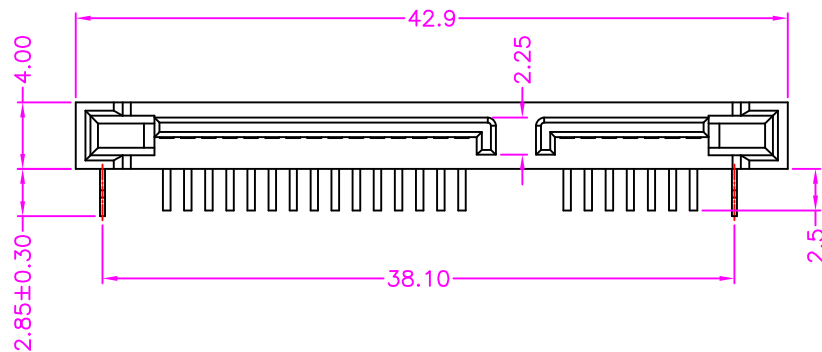

P.C.B. LAYOUT
TOP VIEW ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SATA-PRA40Z-15+7-LF
SERIES | CLIP | 15+7 WAY | LEADFREE
MALE | HIGH 4.0mm | UPPER CONTACT
DIP 90°

DESCRIPTION: SATA 7+15PIN, PCB MOUNT, SMT, ALL PLASTIC, WITH BOARDLOCK H=4.00mm, MALE