


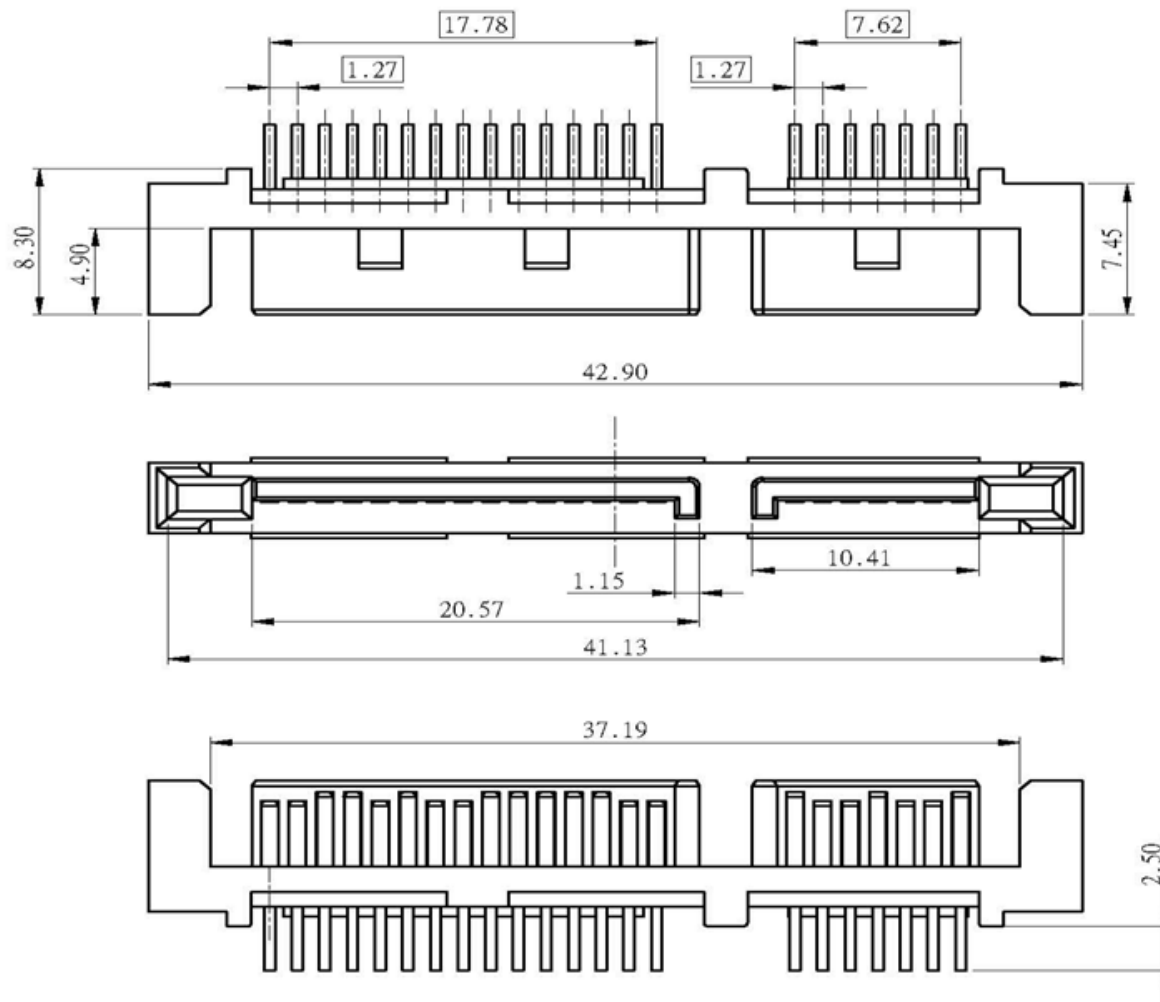


TABLE:

SATA-PS-7+15	GOLD FLASH	LCP BLACK	GP
PART NO.	PLATED	PLASTIC&COLOR	NOTE

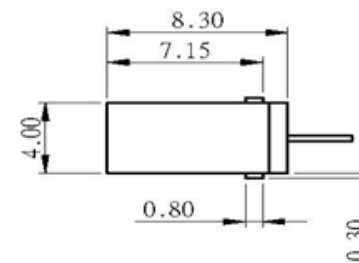

NOTE:

- MATERIAL :
BASE:SEE TABEL UL94V-0.
TERMINAL: COPPER ALLOY,T= 0.30 mm.
- PLATING:
CONTACT:GOLD PLATIN ON CONTACT AREAS;
NICKEL UNDERPLATE OVER ALL.
- ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SATA-PS-7+15-LF

SERIES | LEADFREE
22 WAY
SOLDER
MALE

DESCRIPTION: