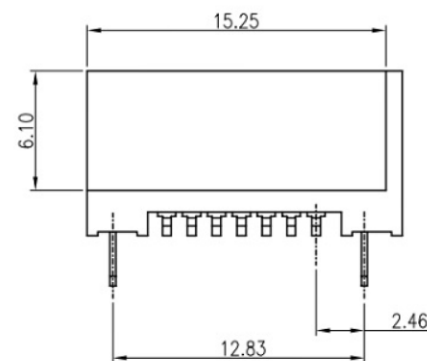
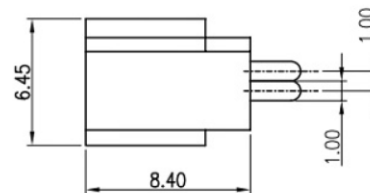
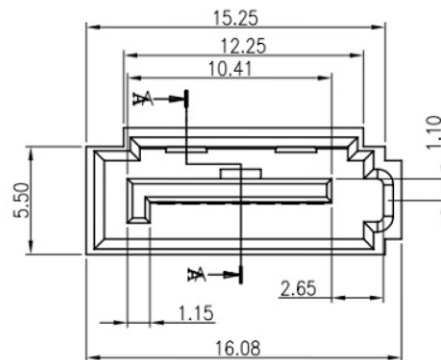
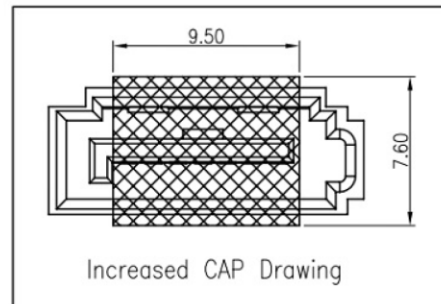
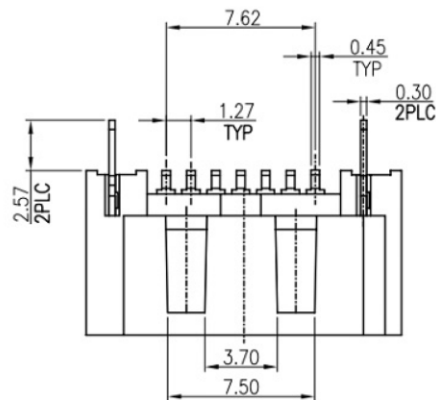


SECTION A-A

NOTES:

1.MATERIAL:

HOUSING:LCP 30% G/F UL94 V-0

COLOR:BLACK

CONTACT:BRASS T=0.25mm

BOARD LOCK:BRASS T=0.30mm

2.FINISH:

CONTACT:GOLD FALSH/TIN PLATING ON CONTACT AREA


100u" MIN.TIN PLATING ON SOLDERTAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

BOARD LOCK:100u"MIN.TIN PLATION ON SOLDERTAILS

50u"MIN.TIN NICKEL UNDERPLATING OVER ALL

1107332XXX-X

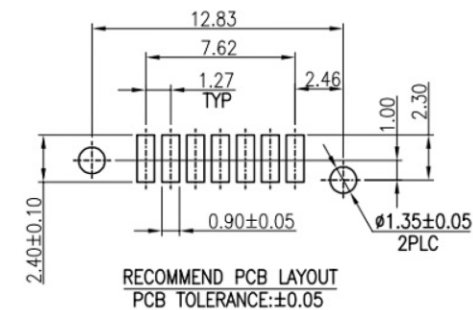

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SATA-PVP1CSxxC-07L-LF
SERIES T T T T T LEADFREE
L TYPE FOOT
07 WAY
MALE MYLAR
180°SMT S15:SEMI GOLD 15u"
POST S30:SEMI GOLD 30u"
C TYPE

DESCRIPTION: SATA 7P B型開槽全包接地片SMT DIP