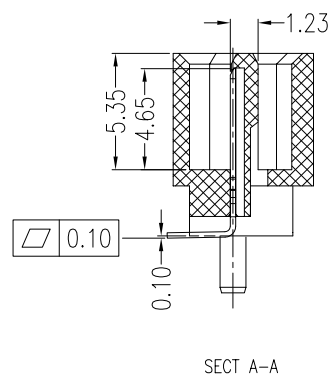
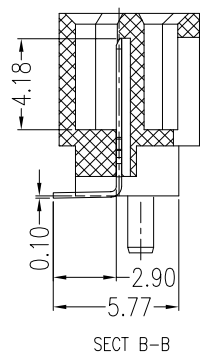
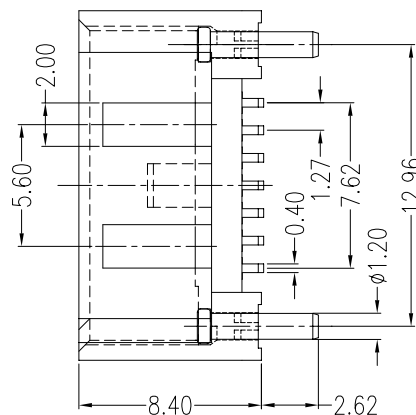
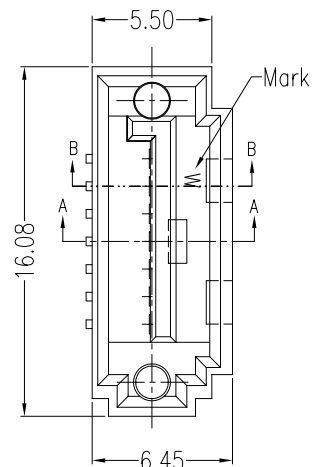


(T=1.60mm)
PCB LAYOUT

NOTES:

*Material

Housing: Nylon 6T, UL 94V-0 rated.

Contact: Brass;

Plating: Gold Plating Over Nickel on Contact Area; Tin Plating on Solder Tail.

*Mechanical

Insertion Force: 45N Max.

Withdrawal Force: 10N Min.

Durability: 500 Cycles.

*Electrical Specification

Current Rating: 1.5 Ampere per contact;

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 1000 megohms min.

Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: -55°C to +125°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SATA-PVPC-07R-LF
SERIES T T T T T LEADFREE
R TYPE FOOT
07 WAY
MALE C TYPE
POST
180°SMT

DESCRIPTION: SATA 7P Reverse Straight DIP A Type Shield Rounded Copper Pole(Through Type) Male