




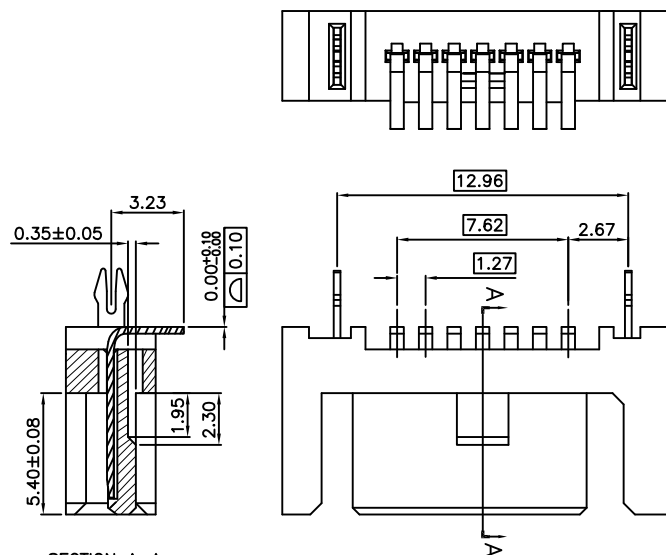

SECTION A-A
SCALE 1 : 1

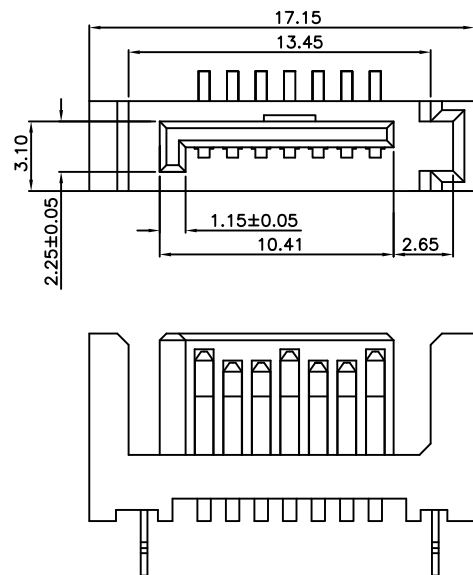

RECOMMEND PCB LAYOUT

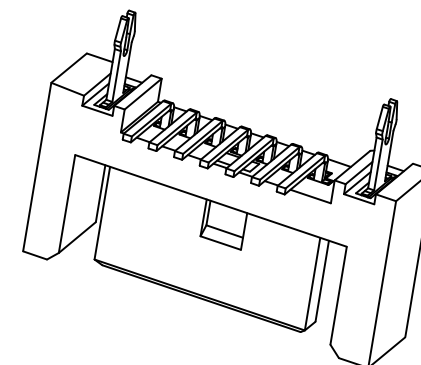

NOTES:

1,MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC,UL94 V-0,
CONTACT:COPPER ALLOY T=0.30mm
LATCH:COPPER ALLOY T=0.30mm

2,PLATING:

LATCH:CU OVER 50u" MIN NICKEL
UNDERPLATE,SOLDERTAIL150u"MIN MISTY TIN OVER
50u" MIN NICKEL UNDERPLATE
CONTACT:100U"MIN MISTY TIN PLATING ON SOLDERTAILS
50U"MIN NICKET UNDERPLATING OVER ALL GOLD SPECIFICATION:
G/F;

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING:1.5 AMPERE PER CONTACT
CONTACT RESISTANCE:30 MILLIOHMS MAX.
INSULATION RESISTANCE:1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE:500 VAC.
OPERATING TEMPERATURE:-20°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SATA-PVZB-07L-LF

SERIES T T T T T LEADFREE
L TYPE FOOT
7 WAY
MALE BOTTOM CONTACT
CLIP
180°SMT

DESCRIPTION: SATA 7P PLUG 雙導槽 SMT BEND