


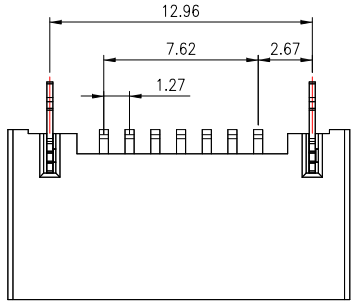


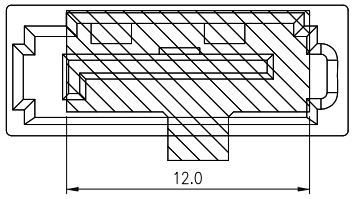



CAP组装图

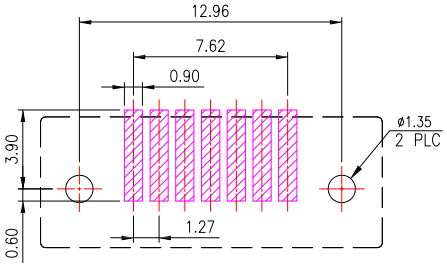

PCB LAYOUT

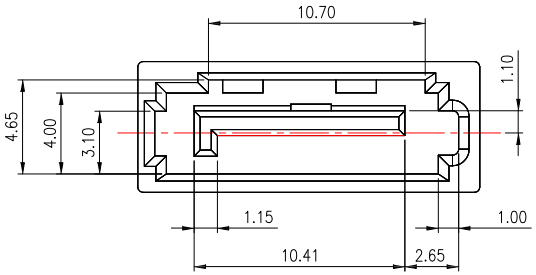



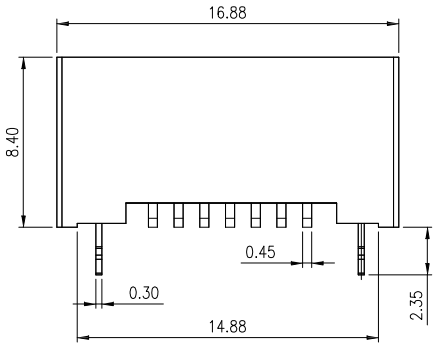

SPECIFICATION:

1.Electrical Specification:

1.1 Current Ration: 12V AC , 1.5A

1.2 Contact Resistance: 45 mΩ max.

1.3 Dielectric Withstanding Voltage: 500V AC

1.4 Operating remperature: -25° to +85°

MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: BRASS

1.3 BOARD LOCK: BRASS

2.Finish:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 BOARD LOCK: TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3°

照片框

ORDER INFORMATION

SATA-PVZCC-07L-LF

SERIES | MALE 180°SMT | CLIP | MYLAR | CAGE TYPE | 07 WAY | L TYPE FOOT | LEADFREE

DESCRIPTION: SATA 7P A 型 直立SMT