


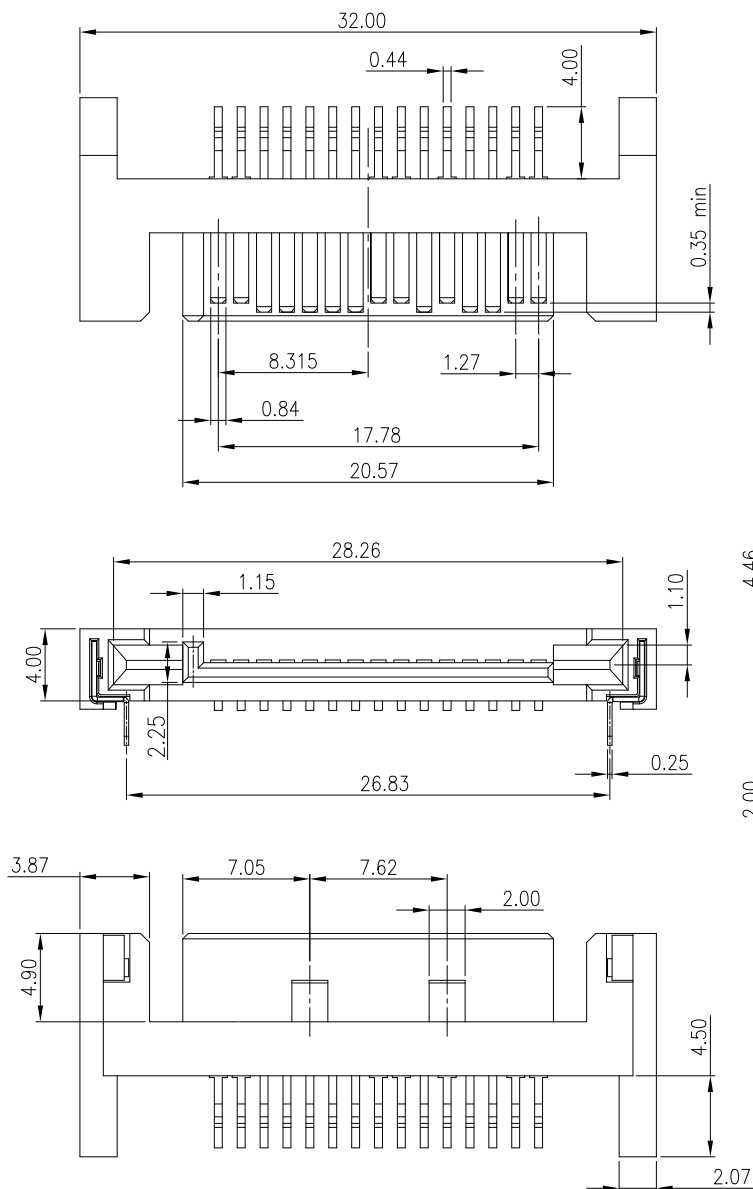

NOTES:

1.MATERIAL:

HOUSING: LCP+30% G.F. UL94V-0 BLACK

CONTACT: PHOSPHOR BRONZE 0.25t

BOARDLOCK: BRASS 0.3t


2.FINISH:

CONTACT: GOLD PLATED ON CONTACT AREA

TIN PLATED ON SOLDER AREA

NICKEL PLATED ALL

BOARDLOCK: TIN PLATED OVER Ni

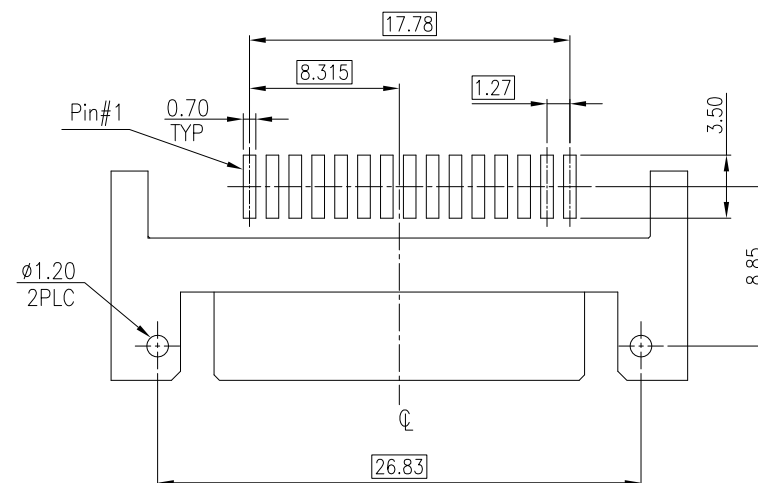

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SATA-PWB044M-15-LF

SERIES T T T T LEADFREE
15 WAY
METAL
HIGH 4.46mm
MALE BOTTOM CONTACT
90°SMT

DESCRIPTION: SATA 15P Male SMT Right Angle With Dual Pegs