

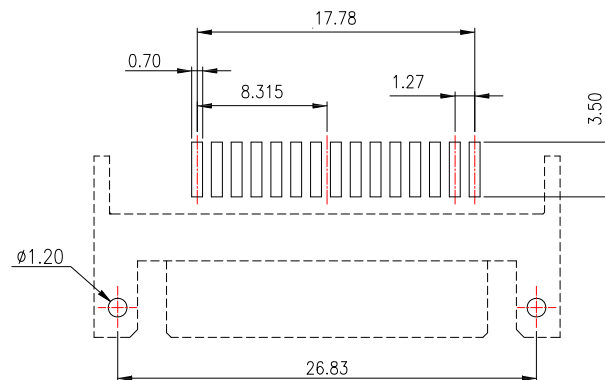
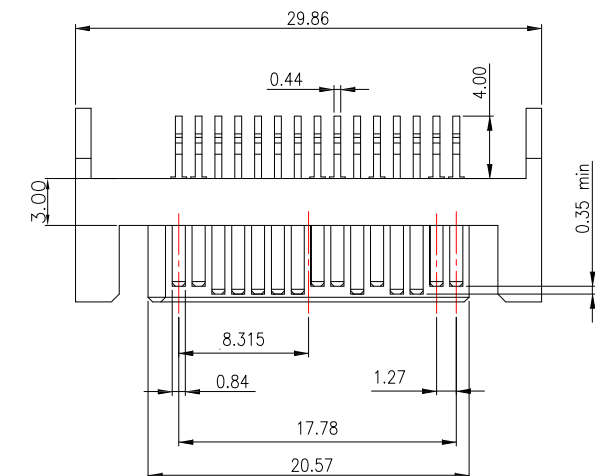
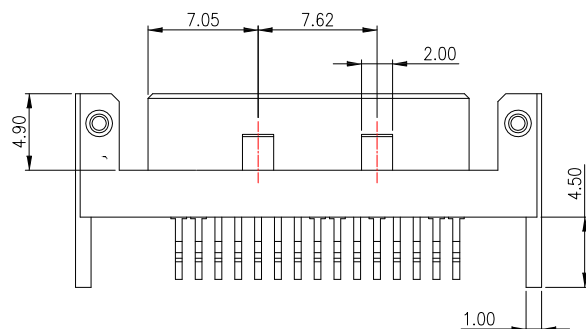




RECOMMENDED PCB LAYOUT

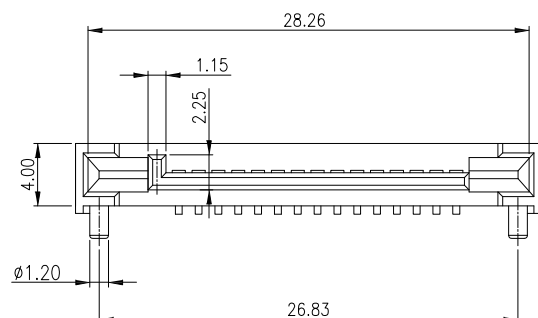

SPECIFICATION:

1.MATERIAL:

1.1 HOUSING: LCP , UL 94V-0 , Black.

1.2 CONTACT: BRASS

2.Finish:

Contact: Plated Gold in Mating Area ;

Tin Plated on Solder Balls ;

Nickel under plated overall

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

SATA-PWB044P-15-LF

SERIES | | | | LEADFREE
15 WAY
POST
HIGH 4.46mm
MALE | BOTTOM CONTACT
90°SMT

DESCRIPTION: SATA 15P 公座 SMT 雙柱 無定位腳