




NOTE:

1. MATERIAL:

HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: BRASS T=0.25mm.

2. FINISH:

CONTACTS: GOLD FLASH PLATED ON CONTACT AREA, [100μ"] MIN..
BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT
UNDERPLATED [50μ"] MIN.. NICKEL.

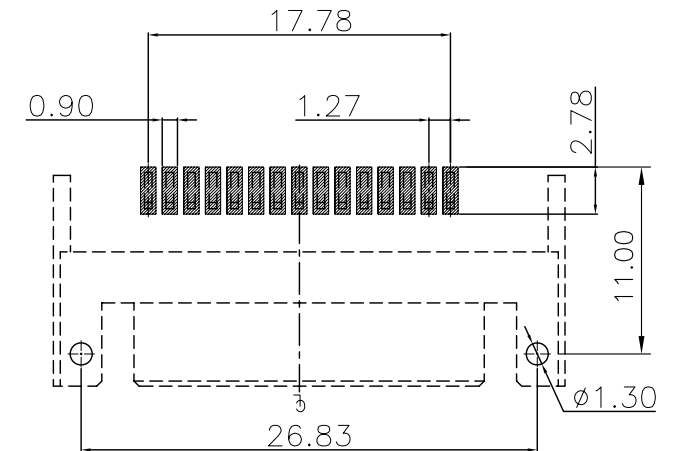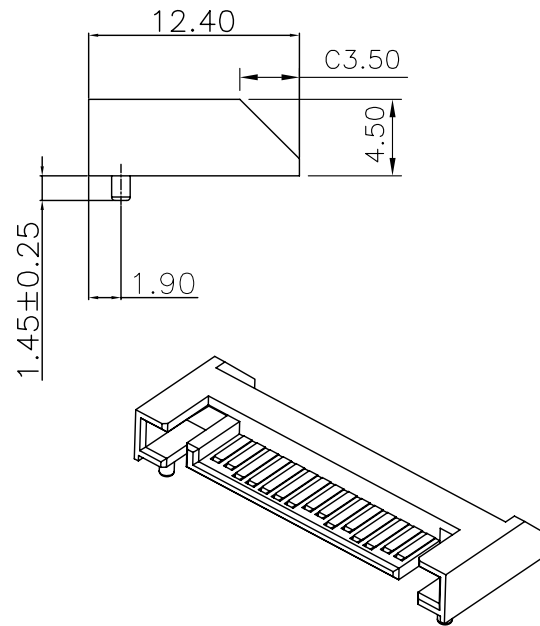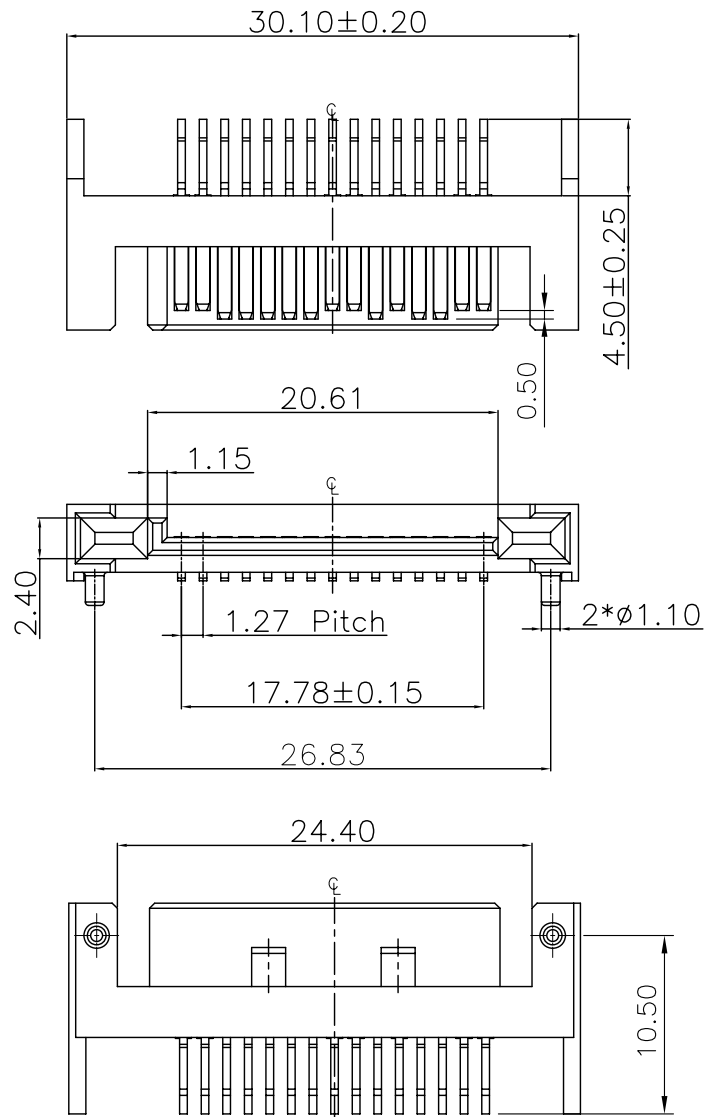

RECOMMEND PCB LAYOUT
PCB TOLERANCE:±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 2°

照片框

ORDER INFORMATION

SATA-PWB045P-15-LF

SERIES
LEADFREE
15 WAY
POST
HIGH 4.5mm
BOTTOM CONTACT
90°SMT
MALE

DESCRIPTION: SATA 15P公座SMT 90度 帶柱CONN