


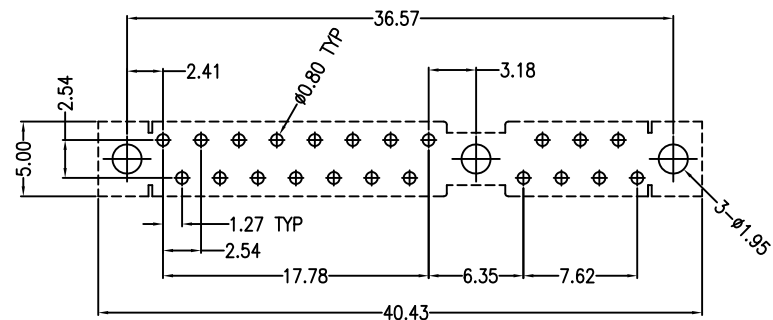
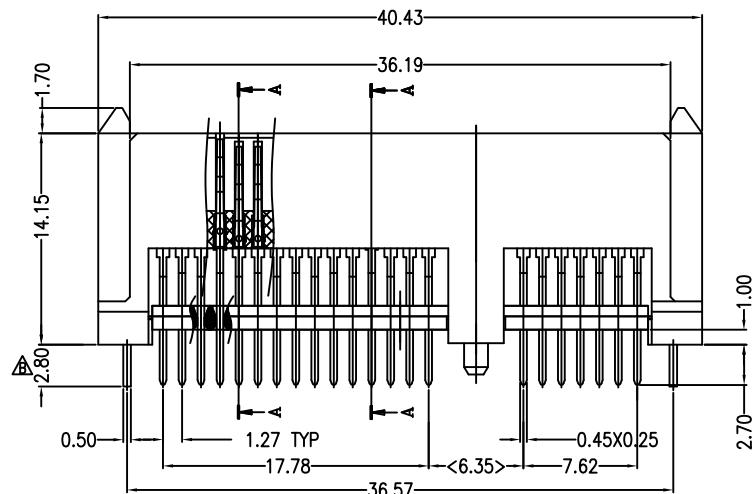
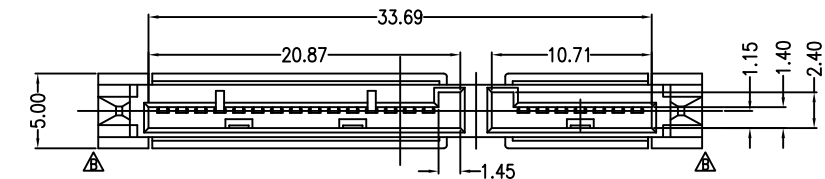


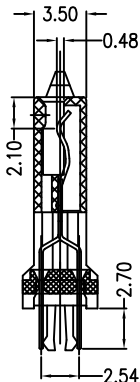

P.C.B. Layout



SECT A-A



SECT B-B

NOTES:

*Material

Housing: LCP, UL 94V-0 Rated; Color: Black.
Contact: Phosphor Bronze
Plating: Gold Plating Over Nickel on Contact Area;
Tin Plating On Solder Tail.

*Electrical Specification

Operation Voltage: 100 VAC Max.
Current Rating: 1.5 Ampere Per Contact
Contact Resistance: 30 Milliohms Max.
Insulation Resistance: 1000 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SATA-SD14Z-7+15-LF

SERIES
CLIP
7+15 WAY
14.15mm
DIP 180°
FEMALE
LEADFREE

DESCRIPTION: SATA 22P High(15.85mm) Double DIP Type (Metal Post) Female