
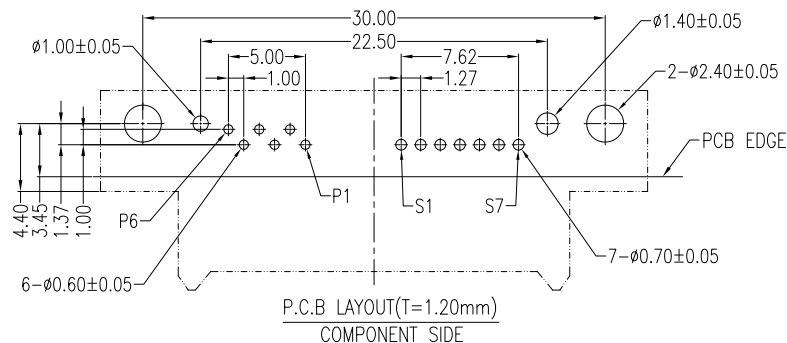
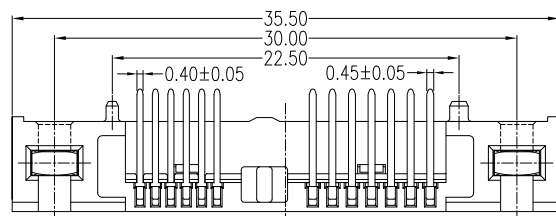




Pin Number	Signal Name	Pin Number	Power Line Designation
S1	GND	P1	DP
S2	A+	P2	+5V
S3	A-	P3	+5V
S4	GND	P4	MD
S5	B-	P5	GND
S6	B+	P6	GND
S7	GND		

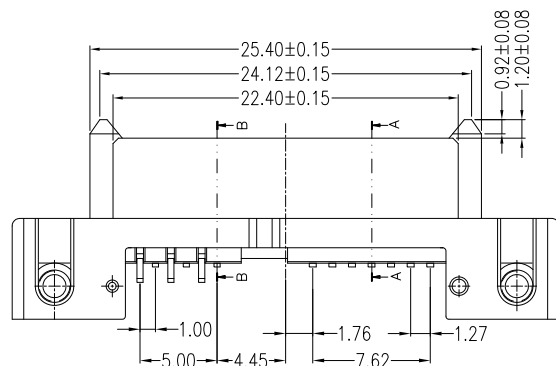

NOTES:

*Material

Housing: ECP 94V-0 rated;Color: Black.

Contact: Phosphor Bronze

Plating: Au plating on contact area;

Sn(100~250u" Min.) plating on solder tail;

Ni(40~80u" Min.) underplating overall.

Screw: Fe Plating over Zn

*Mechanical

Insertion Force: 45N max.

Withdrawal Force: 10N min.

Durability: 500 cycles

*Electrical Specification

Current Rating: 1.5 Ampere per contact



Contact Resistance: 30mΩ max.

Insulation Resistance: 1000MΩ min.

Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature:-55°C to +85°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ± 3°

照片框

ORDER INFORMATION

SATA-SRA061PE1-6+7-LF
SERIES FEMALE DIP 90° HIGH 6.15mm UPPER CONTACT
LEADFREE 6+7 WAY
EAR POST

DESCRIPTION: S ATA 7+6P 90° DIP(2Rows) Screw Type Female (6.15) With Screw