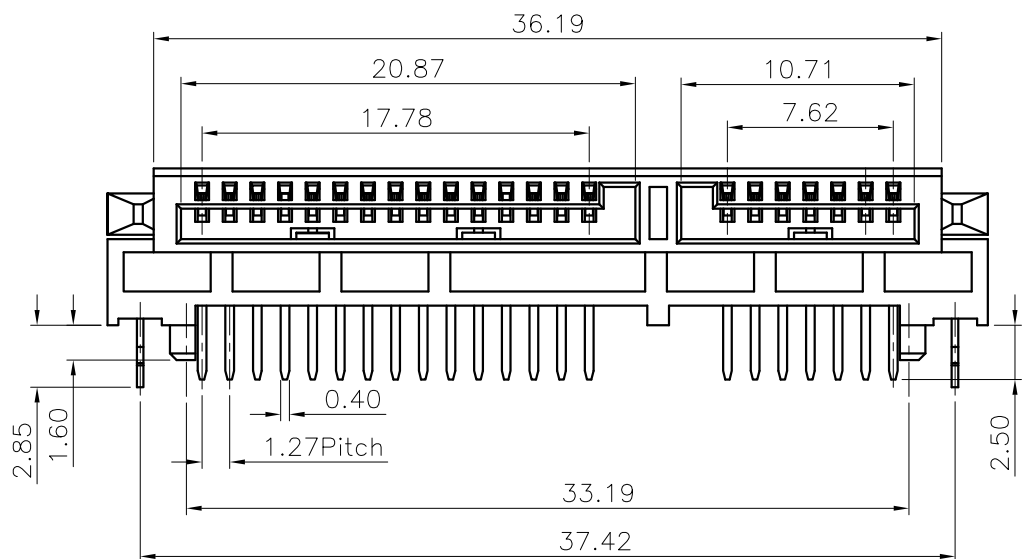
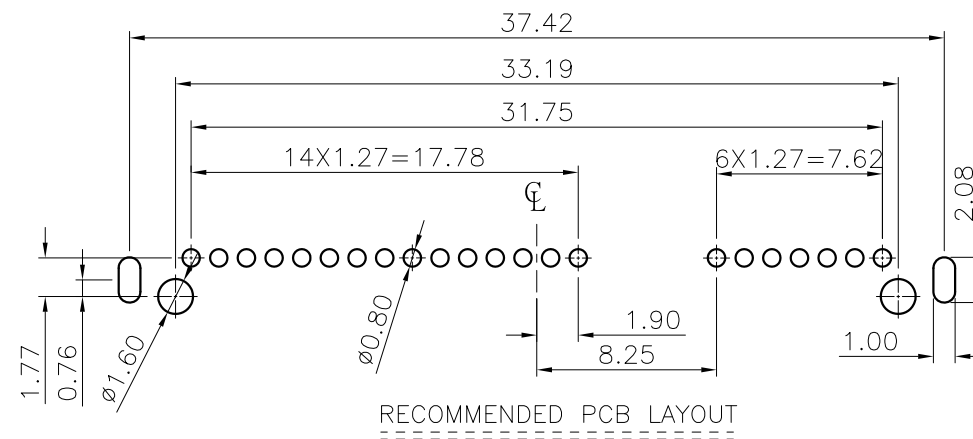
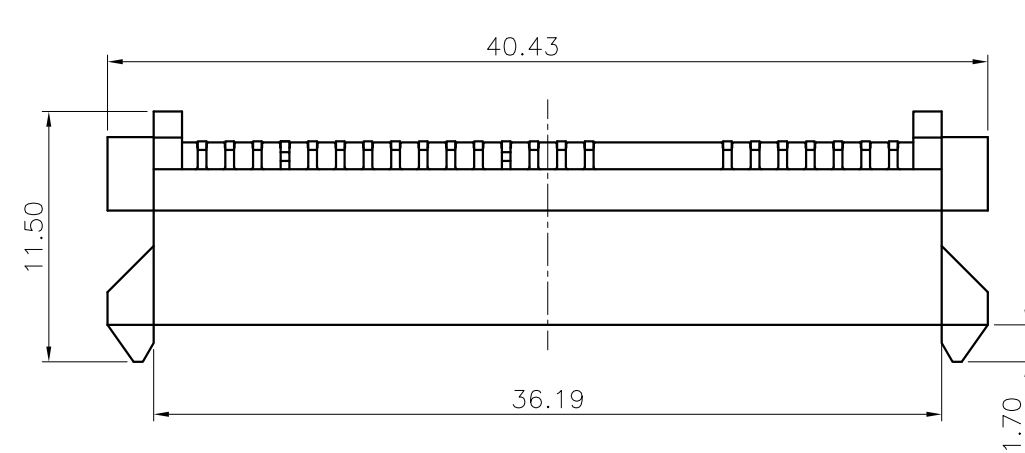


- NOTE:
- 1.MATERIAL :
BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
TERMINAL:COPPER ALLOY,THICKNESS = 0.30 mm
FORKLOCK:COPPER ALLOY,THICKNESS = 0.30 mm
 - 2.PLATING:
CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL:150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION:SEE TABLE
 - 3.ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRA068PZ-15+7-LF

SERIES
FEMALE
LEADFREE
15+7 PIN
POST+CLIP
HIGH 6.85mm
UPPER CONTACT
DIP 90°

DESCRIPTION: SATA 22P SOCKET 上彈點 R/A DIP