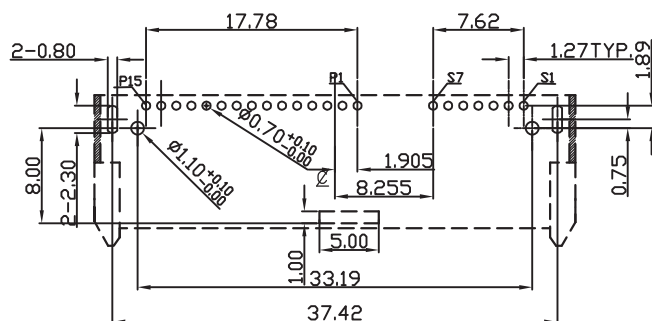
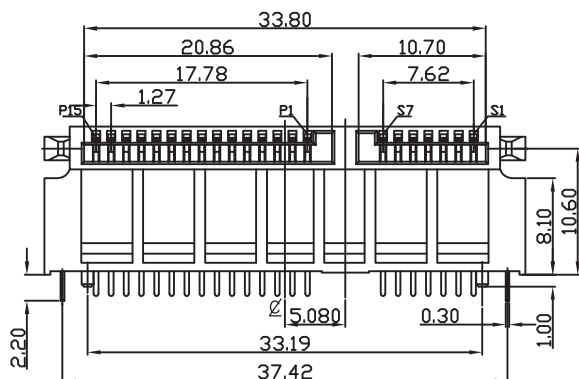
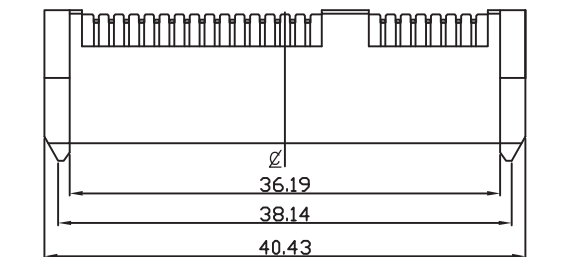


NOTES:

1. MATERIAL :

INSULATOR : LCP , 30% GLASS FILLED , UL 94 V-0
RATED OR OTHER EQUIVALENT HIGH
TEMP RESINS .


CONTACT : PHOSPHOR BRONZE JIS C5210 R-EH, T=0.25±0.01mm.

METAL CLIP: BRASS,T=0.30±0.01mm.

2. FINISH :

CONTACTS : GOLD PLATING IN THE CONTACT AREA
AND SELECT PLATING IN THE SOLDER TAIL AREA,
WITH 50u"(min.)NICKEL UNDERPLATING OVERALL.

METAL CLIP: SELECTED PLATING WITH
50U"(min) NICKEL PLATING OVERALL.



RECOMMEND P.C.B. LAYOUT (component side)
DEFAULT TOLERANCES:±0.05; PCB THICKNESS : 1.2MM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRA123PZ2-15+7-LF



DESCRIPTION: SATA HDD RECEPTACLE H=10.60 REV.